

EXHIBIT 38

US009195258B2

(12) **United States Patent**
Millington

(10) **Patent No.:** **US 9,195,258 B2**
(45) **Date of Patent:** **Nov. 24, 2015**

(54) **SYSTEM AND METHOD FOR
SYNCHRONIZING OPERATIONS AMONG A
PLURALITY OF INDEPENDENTLY
CLOCKED DIGITAL DATA PROCESSING
DEVICES**

(71) Applicant: **Sonos, Inc.**, Santa Barbara, CA (US)

(72) Inventor: **Nicholas A. J. Millington**, Santa
Barbara, CA (US)

(73) Assignee: **Sonos, Inc.**, Santa Barbara, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/184,935**

(22) Filed: **Feb. 20, 2014**

(65) **Prior Publication Data**

US 2014/0181173 A1 Jun. 26, 2014

Related U.S. Application Data

(63) Continuation of application No. 13/864,251, filed on
Apr. 17, 2013, and a continuation-in-part of

(Continued)

(51) **Int. Cl.**

G06F 15/16 (2006.01)

G06F 1/00 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **G06F 1/00** (2013.01); **G05B 15/02** (2013.01);

G06F 3/048 (2013.01); **G06F 3/0482**

(2013.01);

(Continued)

(58) **Field of Classification Search**

CPC G06F 3/167; G06F 17/00; G06F 17/3074;
G06F 3/048; G06F 3/0482; G06F 3/0484;
G06F 3/126; G06F 3/16; H04L 65/60; H04L
12/2812

USPC 709/219, 231

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,296,278 A 10/1981 Cullison et al.
4,816,989 A 3/1989 Finn et al.

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0251584 A2 1/1988
EP 0672985 A1 9/1995

(Continued)

OTHER PUBLICATIONS

PRISMIQ; Inc., "PRISMIQ Media Player User Guide", 2003, 44
pages.

(Continued)

Primary Examiner — Oleg Survillo


(74) *Attorney, Agent, or Firm* — McDonnell Boehnen
Hulbert & Berghoff LLP

(57)

ABSTRACT

A system is described for maintaining synchrony of operations among a plurality of devices that have independent clocking arrangements. The system includes a task distribution device that distributes tasks to a synchrony group comprising a plurality of devices that are to perform the tasks distributed by the task distribution device in synchrony. The task distribution device distributes each task to the members of the synchrony group over a network. Each task is associated with a time stamp that indicates a time, relative to a clock maintained by the task distribution device, at which the members of the synchrony group are to execute the task. Each member of the synchrony group periodically obtains from the task distribution device an indication of the current time indicated by its clock, determines a time differential between the task distribution device's clock and its respective clock and determines therefrom a time at which, according to its respective clock, the time stamp indicates that it is to execute the task.

26 Claims, 5 Drawing Sheets

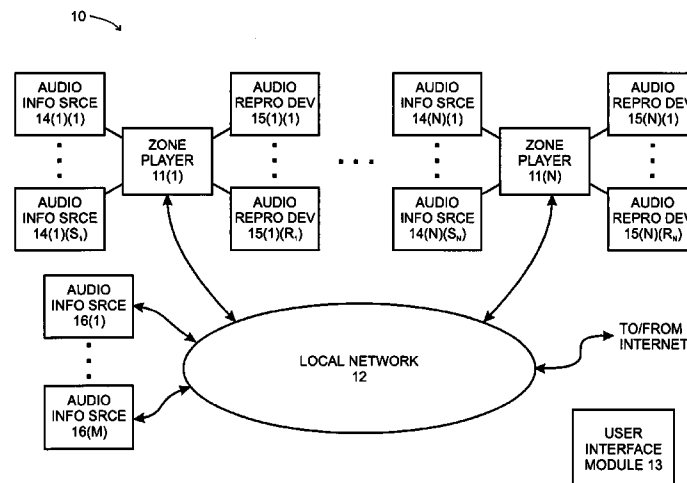

US 9,195,258 B2

Page 2

Related U.S. Application Data

- application No. 13/297,000, filed on Nov. 15, 2011, and a continuation-in-part of application No. 10/816,217, filed on Apr. 1, 2004, now Pat. No. 8,234,395.
- (60) Provisional application No. 60/490,768, filed on Jul. 28, 2003.
- (51) **Int. Cl.**
- | | | | | | |
|--------------------|-----------|----------------|---------|-------------------|-----------|
| <i>H04J 3/06</i> | (2006.01) | 5,787,249 A | 7/1998 | Badovinatx et al. | |
| <i>H04R 27/00</i> | (2006.01) | 5,808,662 A | 9/1998 | Kinney et al. | |
| <i>G06F 17/00</i> | (2006.01) | 5,815,689 A | 9/1998 | Shaw et al. | |
| <i>H03G 3/20</i> | (2006.01) | 5,867,691 A | 2/1999 | Shiraishi | |
| <i>H04L 29/06</i> | (2006.01) | 5,875,354 A | 2/1999 | Charlton et al. | |
| <i>G06F 3/048</i> | (2013.01) | 5,887,143 A | 3/1999 | Saito et al. | |
| <i>G06F 3/16</i> | (2006.01) | 5,923,869 A * | 7/1999 | Kashiwagi et al. | 713/501 |
| <i>H04L 29/08</i> | (2006.01) | 5,923,902 A | 7/1999 | Inagaki | |
| <i>G06F 3/0484</i> | (2013.01) | 5,946,343 A | 8/1999 | Schotz et al. | |
| <i>H04R 3/12</i> | (2006.01) | 5,956,088 A | 9/1999 | Shen et al. | |
| <i>G06F 17/30</i> | (2006.01) | 6,009,457 A | 12/1999 | Moller | |
| <i>G06F 3/0482</i> | (2013.01) | 6,026,150 A | 2/2000 | Frank et al. | |
| <i>H03G 3/00</i> | (2006.01) | 6,031,818 A | 2/2000 | Lo et al. | |
| <i>H04H 20/10</i> | (2008.01) | 6,108,485 A * | 8/2000 | Kim | 386/201 |
| <i>H04H 20/26</i> | (2008.01) | 6,108,686 A | 8/2000 | Williams, Jr. | |
| <i>G05B 15/02</i> | (2006.01) | 6,122,668 A | 9/2000 | Teng et al. | |
| <i>G11B 20/10</i> | (2006.01) | 6,128,318 A | 10/2000 | Sato | |
| <i>H04N 5/04</i> | (2006.01) | 6,157,957 A | 12/2000 | Berthaud | |
| <i>H04N 9/79</i> | (2006.01) | 6,175,872 B1 | 1/2001 | Neumann et al. | |
| <i>H04N 21/43</i> | (2011.01) | 6,185,737 B1 | 2/2001 | Northcutt et al. | |
| <i>H04N 21/436</i> | (2011.01) | 6,195,436 B1 | 2/2001 | Scibora et al. | |
| | | 6,199,169 B1 | 3/2001 | Voth | |
| | | 6,255,961 B1 | 7/2001 | Van et al. | |
| | | 6,256,554 B1 | 7/2001 | DiLorenzo | |
| | | 6,308,207 B1 | 10/2001 | Tseng et al. | |
| | | 6,324,586 B1 | 11/2001 | Johnson | |
| | | 6,332,147 B1 | 12/2001 | Moran et al. | |
| | | 6,343,028 B1 * | 1/2002 | Kuwaoka | 369/47.26 |
| | | 6,349,339 B1 | 2/2002 | Williams | |
| | | 6,351,821 B1 | 2/2002 | Voth | |
| | | 6,404,811 B1 | 6/2002 | Cvetko et al. | |
| | | 6,430,353 B1 | 8/2002 | Honda et al. | |
| | | 6,449,653 B2 | 9/2002 | Klemets et al. | |
| | | 6,487,296 B1 | 11/2002 | Allen et al. | |
| | | 6,522,886 B1 | 2/2003 | Youngs et al. | |
| | | 6,526,325 B1 * | 2/2003 | Sussman et al. | 700/94 |
| | | 6,535,121 B2 | 3/2003 | Matheny et al. | |
| | | 6,587,127 B1 | 7/2003 | Leeke et al. | |
| | | 6,598,172 B1 | 7/2003 | VanDeusen et al. | |
| | | 6,611,537 B1 | 8/2003 | Edens et al. | |
| | | 6,631,410 B1 | 10/2003 | Kowalski et al. | |
| | | 6,674,803 B1 | 1/2004 | Kesselring | |
| | | 6,687,664 B1 * | 2/2004 | Sussman et al. | 704/201 |
| | | 6,757,517 B2 | 6/2004 | Chang | |
| | | 6,778,493 B1 | 8/2004 | Ishii | |
| | | 6,778,869 B2 | 8/2004 | Champion | |
| | | 6,816,818 B2 * | 11/2004 | Wolf et al. | 702/188 |
| | | 6,823,225 B1 | 11/2004 | Sass | |
| | | 6,826,283 B1 | 11/2004 | Wheeler et al. | |
| | | 6,836,788 B2 | 12/2004 | Kim et al. | |
| | | 6,839,752 B1 | 1/2005 | Miller et al. | |
| | | 6,898,642 B2 | 5/2005 | Chaffe et al. | |
| | | 6,907,458 B2 | 6/2005 | Tomassetti et al. | |
| | | 6,912,610 B2 | 6/2005 | Spencer | |
| | | 6,920,373 B2 | 7/2005 | Xi et al. | |
| | | 6,934,766 B1 | 8/2005 | Russell | |
| | | 6,970,482 B2 | 11/2005 | Kim | |
| | | 6,985,694 B1 | 1/2006 | De et al. | |
| | | 7,007,106 B1 | 2/2006 | Flood et al. | |
| | | 7,020,791 B1 | 3/2006 | Aweya et al. | |
| | | 7,043,651 B2 | 5/2006 | Aweya et al. | |
| | | 7,047,308 B2 | 5/2006 | Deshpande | |
| | | 7,068,596 B1 | 6/2006 | Mou | |
| | | 7,113,999 B2 | 9/2006 | Pestoni et al. | |
| | | 7,115,017 B1 | 10/2006 | Laursen et al. | |
| | | 7,130,368 B1 * | 10/2006 | Aweya et al. | 375/376 |
| | | 7,130,608 B2 | 10/2006 | Hollstrom et al. | |
| | | 7,130,616 B2 | 10/2006 | Janik | |
| | | 7,136,934 B2 | 11/2006 | Carter et al. | |
| | | 7,143,141 B1 | 11/2006 | Morgan et al. | |
| | | 7,143,939 B2 | 12/2006 | Henzerling | |
| | | 7,162,315 B2 | 1/2007 | Gilbert | |
| | | 7,185,090 B2 | 2/2007 | Kowalski et al. | |
| | | 7,187,947 B1 | 3/2007 | White et al. | |
| | | 7,206,367 B1 | 4/2007 | Moore | |
| | | 7,206,967 B1 | 4/2007 | Marti et al. | |
| | | 7,209,795 B2 | 4/2007 | Sullivan et al. | |
| | | 7,218,708 B2 | 5/2007 | Berezowski et al. | |
| | | 7,236,739 B2 | 6/2007 | Chang | |
- (52) **U.S. Cl.**
- CPC *G06F 3/0484* (2013.01); *G06F 3/16* (2013.01); *G06F 3/165* (2013.01); *G06F 3/167* (2013.01); *G06F 17/00* (2013.01); *G06F 17/3074* (2013.01); *G11B 20/10527* (2013.01); *H03G 3/00* (2013.01); *H03G 3/20* (2013.01); *H04H 20/103* (2013.01); *H04H 20/26* (2013.01); *H04J 3/0664* (2013.01); *H04L 65/60* (2013.01); *H04L 65/80* (2013.01); *H04L 67/1095* (2013.01); *H04L 67/26* (2013.01); *H04L 69/28* (2013.01); *H04N 5/04* (2013.01); *H04N 9/7904* (2013.01); *H04N 21/4307* (2013.01); *H04N 21/43615* (2013.01); *H04R 3/12* (2013.01); *H04R 27/00* (2013.01); *G11B 2020/10592* (2013.01); *H04H 2201/20* (2013.01); *H04L 65/4076* (2013.01); *H04R 2227/003* (2013.01); *H04R 2227/005* (2013.01)
- (56) **References Cited**
- U.S. PATENT DOCUMENTS
- | | | | |
|---------------|---------|-------------------|---------|
| 5,153,579 A | 10/1992 | Fisch et al. | |
| 5,182,552 A | 1/1993 | Paynting | |
| 5,239,458 A | 8/1993 | Suzuki | |
| 5,299,266 A | 3/1994 | Lumsden | |
| 5,406,634 A | 4/1995 | Anderson et al. | |
| 5,440,644 A | 8/1995 | Farinelli et al. | |
| 5,467,342 A | 11/1995 | Logston et al. | |
| 5,491,839 A | 2/1996 | Schotz | |
| 5,553,222 A | 9/1996 | Milne et al. | |
| 5,602,992 A | 2/1997 | Danneels | |
| 5,668,884 A | 9/1997 | Clair, Jr. et al. | |
| 5,673,323 A | 9/1997 | Schotz et al. | |
| 5,696,896 A | 12/1997 | Badovinatx et al. | |
| 5,726,989 A * | 3/1998 | Dokic | 370/509 |
| 5,751,819 A | 5/1998 | Dorrough | |
| 5,761,320 A | 6/1998 | Farinelli et al. | |

US 9,195,258 B2

Page 3

(56)

References Cited

U.S. PATENT DOCUMENTS

7,236,773 B2	6/2007	Thomas	2002/0034374 A1	3/2002	Barton
7,293,060 B2	11/2007	Komsi	2002/0042844 A1	4/2002	Chiazzese
7,312,785 B2	12/2007	Tsuk et al.	2002/0049843 A1	4/2002	Barone et al.
7,313,593 B1	12/2007	Pulito et al.	2002/0062406 A1 *	5/2002	Chang et al. 710/1
7,324,857 B2	1/2008	Goddard	2002/0065926 A1	5/2002	Hackney et al.
7,333,519 B2	2/2008	Sullivan et al.	2002/0072816 A1	6/2002	Shdema et al.
7,372,846 B2	5/2008	Zwack	2002/0073228 A1	6/2002	Cognet et al.
7,392,102 B2	6/2008	Sullivan et al.	2002/0080783 A1 *	6/2002	Fujimori 370/384
7,412,499 B2	8/2008	Chang et al.	2002/0090914 A1	7/2002	Kang et al.
7,483,538 B2	1/2009	McCarty et al.	2002/0093478 A1	7/2002	Yeh
7,483,958 B1	1/2009	Elabbady et al.	2002/0095460 A1	7/2002	Benson
7,519,667 B1	4/2009	Capps	2002/0109710 A1	8/2002	Holtz et al.
7,571,014 B1	8/2009	Lambourne et al.	2002/0112244 A1	8/2002	Liou et al.
7,574,274 B2	8/2009	Holmes	2002/0114354 A1 *	8/2002	Sinha et al. 370/503
7,599,685 B2	10/2009	Goldberg et al.	2002/0114359 A1 *	8/2002	Ibaraki et al. 370/535
7,606,174 B2	10/2009	Ochi et al.	2002/0124097 A1	9/2002	Isely et al.
7,643,894 B2	1/2010	Braithwaite et al.	2002/0129156 A1	9/2002	Yoshikawa
7,657,224 B2	2/2010	Goldberg et al.	2002/0143998 A1	10/2002	Rajagopal et al.
7,657,644 B1	2/2010	Zheng	2002/0159596 A1	10/2002	Durand
7,657,910 B1	2/2010	McAulay et al.	2002/0163361 A1	11/2002	Parkin
7,668,990 B2	2/2010	Krzyzanowski et al.	2002/0165721 A1	11/2002	Chang
7,669,219 B2	2/2010	Scott, III	2002/0165921 A1	11/2002	Sapieyevski
7,675,943 B2	3/2010	Mosig	2002/0168938 A1	11/2002	Chang
7,676,142 B1	3/2010	Hung	2002/0173273 A1 *	11/2002	Spurgat et al. 455/66
7,702,279 B2	4/2010	Ko et al.	2002/0177411 A1	11/2002	Yajima et al.
7,702,403 B1	4/2010	Gladwin et al.	2002/0184310 A1	12/2002	Traversat et al.
7,711,774 B1	5/2010	Rothschild	2002/0188762 A1	12/2002	Tomassetti et al.
7,720,096 B2	5/2010	Klemets	2002/0194309 A1	12/2002	Carter et al.
7,742,740 B2	6/2010	Goldberg et al.	2003/0002609 A1	1/2003	Faller et al.
7,743,009 B2	6/2010	Hangartner et al.	2003/0018797 A1	1/2003	Dunning et al.
RE41,608 E	8/2010	Blair et al.	2003/0020763 A1	1/2003	Mayer et al.
7,835,689 B2	11/2010	Goldberg et al.	2003/0023741 A1	1/2003	Tomassetti et al.
7,853,341 B2	12/2010	McCarty et al.	2003/0035072 A1	2/2003	Hagg
7,865,137 B2	1/2011	Goldberg et al.	2003/0035444 A1	2/2003	Zwack
7,885,622 B2	2/2011	Krampf et al.	2003/0041173 A1	2/2003	Hoyle
7,916,877 B2	3/2011	Goldberg et al.	2003/0041174 A1	2/2003	Wen et al.
7,917,082 B2	3/2011	Goldberg et al.	2003/0043924 A1	3/2003	Haddad et al.
7,934,239 B1	4/2011	Dagman	2003/0055892 A1	3/2003	Huitema et al.
7,996,588 B2	8/2011	Subbiah et al.	2003/0061428 A1	3/2003	Garney et al.
8,014,423 B2	9/2011	Thaler et al.	2003/0066094 A1	4/2003	Van et al.
8,020,023 B2	9/2011	Millington et al.	2003/0067437 A1	4/2003	McClintock et al.
8,023,663 B2	9/2011	Goldberg	2003/0073432 A1	4/2003	Meade
8,028,038 B2	9/2011	Weel	2003/0099212 A1	5/2003	Anjum et al.
8,028,323 B2	9/2011	Weel	2003/0099221 A1	5/2003	Rhee
8,045,952 B2	10/2011	Qureshey et al.	2003/0110329 A1	6/2003	Higaki et al.
8,050,652 B2	11/2011	Qureshey et al.	2003/0126211 A1	7/2003	Antila et al.
8,074,253 B1	12/2011	Nathan	2003/0157951 A1	8/2003	Hasty
8,086,752 B2	12/2011	Millington et al.	2003/0195964 A1	10/2003	Mane
8,103,009 B2	1/2012	McCarty et al.	2003/0198254 A1 *	10/2003	Sullivan et al. 370/503
8,112,032 B2	2/2012	Ko et al.	2003/0198255 A1 *	10/2003	Sullivan et al. 370/503
8,131,390 B2	3/2012	Braithwaite et al.	2003/0198257 A1 *	10/2003	Sullivan et al. 370/516
8,169,938 B2	5/2012	Duchscher et al.	2003/0200001 A1 *	10/2003	Goddard 700/94
8,214,873 B2	7/2012	Weel	2003/0204273 A1	10/2003	Dinker et al.
8,230,099 B2	7/2012	Weel	2003/0204509 A1	10/2003	Dinker et al.
8,234,395 B2	7/2012	Millington	2003/0210796 A1	11/2003	McCarty et al.
8,290,603 B1	10/2012	Lambourne	2003/0219007 A1	11/2003	Barrack et al.
8,315,555 B2	11/2012	Ko et al.	2003/0227478 A1	12/2003	Chatfield
8,370,678 B2	2/2013	Millington et al.	2003/0231871 A1	12/2003	Ushimaru
8,423,659 B2	4/2013	Millington	2003/0235304 A1	12/2003	Evans et al.
8,473,844 B2	6/2013	Kreifeldt et al.	2004/0001484 A1	1/2004	Ozguner
8,588,949 B2	11/2013	Lambourne et al.	2004/0001591 A1	1/2004	Mani et al.
9,042,556 B2	5/2015	Kallai et al.	2004/0008852 A1	1/2004	Also et al.
2001/0009604 A1	7/2001	Ando et al.	2004/0010727 A1	1/2004	Fujinami
2001/0022823 A1	9/2001	Renaud	2004/0012620 A1	1/2004	Buhler
2001/0027498 A1	10/2001	Van et al.	2004/0015252 A1	1/2004	Aiso et al.
2001/0032188 A1	10/2001	Miyabe et al.	2004/0019497 A1	1/2004	Volk et al.
2001/0042107 A1	11/2001	Palm	2004/0024478 A1	2/2004	Hans et al.
2001/0046235 A1	11/2001	Trevitt et al.	2004/0024925 A1	2/2004	Cypher et al.
2001/0047377 A1	11/2001	Sincaglia	2004/0027166 A1	2/2004	Mangum et al.
2002/0002039 A1	1/2002	Qureshey et al.	2004/0032348 A1	2/2004	Lai et al.
2002/0002562 A1	1/2002	Moran et al.	2004/0041836 A1	3/2004	Zaner et al.
2002/0002565 A1	1/2002	Ohyama	2004/0048569 A1	3/2004	Kawamura
2002/0003548 A1	1/2002	Krusche et al.	2004/0066736 A1	4/2004	Kroeger
2002/0022453 A1	2/2002	Balog et al.	2004/0075767 A1	4/2004	Neuman et al.
2002/0026442 A1	2/2002	Lipscomb et al.	2004/0078383 A1	4/2004	Mercer et al.
			2004/0080671 A1	4/2004	Siemens et al.
			2004/0093096 A1	5/2004	Huang et al.
			2004/0098754 A1	5/2004	Vella et al.
			2004/0131192 A1	7/2004	Metcalf

US 9,195,258 B2

Page 4

(56)

References Cited

U.S. PATENT DOCUMENTS

2004/0133689 A1 7/2004 Vasisht
 2004/0143368 A1 7/2004 May et al.
 2004/0143852 A1 7/2004 Meyers
 2004/0148237 A1 7/2004 Bittmann et al.
 2004/0170383 A1 9/2004 Mazur
 2004/0203378 A1 10/2004 Powers
 2004/0208158 A1* 10/2004 Fellman et al. 370/345
 2004/0213230 A1 10/2004 Douskalis et al.
 2004/0224638 A1 11/2004 Fadell
 2004/0228367 A1 11/2004 Mosig et al.
 2004/0248601 A1 12/2004 Chang
 2004/0249965 A1 12/2004 Huggins et al.
 2004/0249982 A1 12/2004 Arnold et al.
 2004/0252400 A1 12/2004 Blank et al.
 2005/0010691 A1 1/2005 Oyadomari et al.
 2005/0011388 A1 1/2005 Kouznetsov
 2005/0013394 A1 1/2005 Rausch et al.
 2005/0015551 A1 1/2005 Eames
 2005/0021590 A1 1/2005 Debique et al.
 2005/0027821 A1 2/2005 Alexander et al.
 2005/0047605 A1 3/2005 Lee et al.
 2005/0058149 A1 3/2005 Howe
 2005/0062637 A1* 3/2005 El Zabadani et al. 341/176
 2005/0081213 A1 4/2005 Suzuoki et al.
 2005/0114538 A1 5/2005 Rose
 2005/0120128 A1 6/2005 Willes et al.
 2005/0125357 A1 6/2005 Saadat et al.
 2005/0131558 A1 6/2005 Braithwaite
 2005/0166135 A1 7/2005 Burke
 2005/0168630 A1 8/2005 Yamada et al.
 2005/0177643 A1 8/2005 Xu
 2005/0181348 A1 8/2005 Carey et al.
 2005/0195205 A1 9/2005 Abrams, Jr.
 2005/0195823 A1 9/2005 Chen et al.
 2005/0216556 A1 9/2005 Manion et al.
 2005/0281255 A1 12/2005 Davies et al.
 2005/0283820 A1 12/2005 Richards et al.
 2005/0288805 A1 12/2005 Moore et al.
 2005/0289224 A1 12/2005 Deslippe et al.
 2006/0095516 A1 5/2006 Wijeratne
 2006/0098936 A1* 5/2006 Ikeda et al. 386/46
 2006/0119497 A1 6/2006 Miller et al.
 2006/0143236 A1 6/2006 Wu
 2006/0193454 A1 8/2006 Abou-chakra et al.
 2007/0038999 A1 2/2007 Millington et al.
 2007/0043847 A1 2/2007 Carter et al.
 2007/0047712 A1 3/2007 Gross et al.
 2007/0048713 A1 3/2007 Plastina et al.
 2007/0054680 A1 3/2007 Mo et al.
 2007/0142022 A1 6/2007 Madonna et al.
 2007/0142944 A1 6/2007 Goldberg et al.
 2007/0143493 A1 6/2007 Mullig et al.
 2007/0169115 A1 7/2007 Ko et al.
 2007/0180137 A1 8/2007 Rajapakse
 2007/0192156 A1 8/2007 Gauger
 2007/0249295 A1 10/2007 Ukita et al.
 2007/0271388 A1 11/2007 Bowra et al.
 2007/0299778 A1 12/2007 Haveson et al.
 2008/0022320 A1 1/2008 Ver
 2008/0091771 A1 4/2008 Allen et al.
 2008/0120429 A1 5/2008 Millington et al.
 2008/0126943 A1 5/2008 Parasnis et al.
 2008/0144861 A1 6/2008 Melanson et al.
 2009/0031336 A1 1/2009 Chavez et al.
 2009/0157905 A1 6/2009 Davis
 2009/0193345 A1 7/2009 Wensley et al.
 2009/0222115 A1 9/2009 Malcolm et al.
 2009/0228919 A1 9/2009 Zott et al.
 2010/0004983 A1 1/2010 Dickerson et al.
 2010/0049835 A1 2/2010 Ko et al.
 2010/0228740 A1 9/2010 Cannistraro et al.
 2010/0284389 A1 11/2010 Ramsay et al.
 2010/0299639 A1 11/2010 Ramsay et al.
 2011/0066943 A1 3/2011 Brillon et al.
 2012/0029671 A1 2/2012 Millington et al.

2012/0030366 A1 2/2012 Collart et al.
 2012/0060046 A1 3/2012 Millington
 2012/0129446 A1 5/2012 Ko et al.
 2012/0290621 A1 11/2012 Heitz, III et al.
 2013/0018960 A1 1/2013 Knysz et al.
 2013/0080599 A1 3/2013 Ko et al.
 2013/0174100 A1 7/2013 Seymour et al.
 2013/0191454 A1 7/2013 Oliver et al.
 2013/0197682 A1 8/2013 Millington
 2014/0181569 A1 6/2014 Millington et al.

FOREIGN PATENT DOCUMENTS

EP 1111527 A2 6/2001
 EP 1122931 A2 8/2001
 EP 2713281 4/2004
 GB 2284327 A 5/1995
 GB 2338374 12/1999
 JP 07-210129 8/1995
 JP 2003037585 2/2003
 JP 2003101958 4/2003
 JP 2005108427 4/2005
 WO 9525313 A1 9/1995
 WO 9961985 A1 12/1999
 WO 0153994 7/2001
 WO 02073851 9/2002
 WO 03093950 A2 11/2003
 WO 2005013047 A2 2/2005

OTHER PUBLICATIONS

Rothermel K., et al., "An Adaptive Stream Synchronization Protocol," 5th International Workshop on Network and Operating System Support for Digital Audio and Video, 1995.
 Schulzrinne H., et al., "RTP: A Transport Protocol for Real-Time Applications, RFC 3550," Network Working Group, 2003, pp. 1-89.
 The MPEG-2 Transport Stream. Retrieved from the Internet< URL: <http://www.coolstf.com/mpeg/#ts>>.
 "UPnP; "Universal Plug and Play Device Architecture"; Jun. 8, 2000; version 1.0; Microsoft Corporation; pp. 1-54".
 "Written Opinion of the International Searching Authority. issued by the International Searching Authority in connection with PCT Application No. PCT/US2013/046386, on Sep. 30, 2013, 6 pages."
 "Yamaha DME 32 manual: copyright 2001".
 Akyildiz I.F., et al., "Multimedia Group Synchronization Protocols for Integrated Services Networks," IEEE Journal on Selected Areas in Communications, 1996, vol. 14 (1), pp. 162-173.
 "AudioTron Quick Start Guide, Version 1.0", Voyetra Turtle Beach, Inc., Mar. 2001, 24 pages.
 "AudioTron Reference Manual, Version 3.0", Voyetra Turtle Beach, Inc., May 2002, 70 pages.
 "AudioTron Setup Guide, Version 3.0", Voyetra Turtle Beach, Inc., May 2002, 38 pages.
 Benslimane A., "A Multimedia Synchronization Protocol for Multicast Groups," Proceedings of the 26th Euromicro Conference, 2000, vol. 1, pp. 456-463.
 Biersack E., et al., "Intra- and Inter-Stream Synchronisation for Stored Multimedia Streams," IEEE International Conference on Multimedia Computing and Systems, 1996, pp. 372-381.
 Blakowski G. et al., "A Media Synchronization Survey: Reference Model, Specification, and Case Studies", Jan. 1996, vol. 14, No. 1, 5-35.
 Bretl W.E., et al., MPEG2 Tutorial [online], 2000 [retrieved on Jan. 13, 2009] Retrieved from the Internet:< <http://www.bretl.com/mpeghtml/MPEGindex.htm>>, pp. 1-23.
 "European Extended Search Report for Application No. 13184747.7 mailed on Feb. 28, 2014, 8 pages".
 Final Office Action mailed Jul. 13, 2009 for U.S. Appl. No. 10/816,217, filed Apr. 1, 2004.
 "Final Office Action mailed Sep. 13, 2012 for U.S. Appl. No. 13/297,000", United States Patent and Trademark Office, Sep. 13, 2012, 17 pages.
 Final Office Action mailed Oct. 21, 2011 for U.S. Appl. No. 10/816,217, filed Apr. 1, 2004.

US 9,195,258 B2

Page 5

(56)

References Cited

OTHER PUBLICATIONS

- Final Office Action mailed Jan. 28, 2011 for U.S. Appl. No. 10/816,217, filed Apr. 1, 2004.
- "Final Office Action mailed Jul. 3, 2012 for U.S. Appl. No. 13/298,090, filed Nov. 16, 2011".
- Final Office Action mailed Jun. 30, 2008 for U.S. Appl. No. 10/816,217, filed Apr. 1, 2004.
- "Final Rejection mailed on Jan. 21, 2010 for U.S. Appl. No. 11/906,702, filed Oct. 2, 2007".
- Huang C.M., et al., "A Synchronization Infrastructure for Multicast Multimedia at the Presentation Layer," IEEE Transactions on Consumer Electronics, 1997, vol. 43 (3), pp. 370-380.
- "International Bureau," "Search Report" issued in connection with International Patent application No. PCT/US2013/046372, mailed Aug. 26, 2013, 3 pages".
- "International Bureau," "Written opinion" issued in connection with International Patent application No. PCT/US2013/046372, mailed Aug. 26, 2013, 4 pages".
- International Search Report for Application No. PCT/US04/23102, mailed on Aug. 1, 2008, 5 pages.
- "International Search Report, issued by the International Searching Authority in connection with PCT Application No. PCT/US2013/046386, on Sep. 30, 2013, 3 pages".
- Ishibashi Y., "A Group Synchronization Mechanism for Live Media in Multicast Communications," IEEE Global Telecommunications Conference, 1997, vol. 2, pp. 746-752.
- Ishibashi Y., "A Group Synchronization Mechanism for Stored Media in Multicast Communications," IEEE Information Revolution and Communications, 1997, vol. 2, pp. 692-700.
- Jo J., et al., "Synchronized One-to-many Media Streaming with Adaptive Payout Control," Proceedings of SPIE, 2002, vol. 4861, pp. 71-82.
- M. Nilsson., "ID3 Tag Version 2", Mar. 26, 1998, 28 Pages.
- "Maniactools, "Identify Duplicate Files by Sound," Sep. 28, 2010, <http://www.maniactools.com/soft/music-duplicate-remover/identify-duplicate-files-by-sound.shtml>".
- Mills D.L., "Network Time Protocol (Version 3) Specification, Implementation and Analysis," Network Working Group, Mar. 1992, <<http://www.ietf.org/rfc/rfc1305.txt>>.
- Mills D.L., "Precision Synchronization of Computer Network Clocks," ACM SIGCOMM Computer Communication Review, 1994, vol. 24 (2), pp. 28-43.
- Motorola., "Simplefi, Wireless Digital Audio Receiver, Installation and User Guide", Dec. 31, 2001.
- "Non-final Office Action in connection with U.S. Appl. No. 13/619,237, mailed Apr. 10, 2013", United States Patent and Trademark Office, 10 pages.
- "Non-Final Office Action mailed Dec. 5, 2013 for U.S. Appl. No. 13/827,653, filed Mar. 14, 2013".
- Non-Final Office Action mailed Jan. 18, 2008 for U.S. Appl. No. 10/816,217, filed Apr. 1, 2004.
- "Non-Final Office Action mailed Mar. 19, 2013 for U.S. Appl. No. 13/724,048, filed Dec. 21, 2012".
- Non-Final Office Action mailed Jun. 21, 2011 for U.S. Appl. No. 10/816,217, filed Apr. 1, 2004.
- Non-Final Office Action mailed Jan. 22, 2009 for U.S. Appl. No. 10/816,217, filed Apr. 1, 2004.
- Non-Final Office Action mailed Jun. 25, 2010 for U.S. Appl. No. 10/816,217, filed Apr. 1, 2004.
- "Non-Final Office Action mailed Nov. 25, 2013 for U.S. Appl. No. 13/533,105, filed Jun. 26, 2012".
- Non-Final Office Action mailed Feb. 29, 2012 for U.S. Appl. No. 13/297,000, filed Nov. 15, 2011.
- "Non-Final Office Action mailed Apr. 30, 2012 for U.S. Appl. No. 13/204,511, filed Aug. 5, 2011".
- "Non-Final Office Action mailed Jul. 30, 2013 for U.S. Appl. No. 13/724,048, filed Dec. 21, 2012".
- "Non-Final Rejection mailed on Aug. 20, 2009 for U.S. Appl. No. 11/906,702, filed Oct. 2, 2007".
- "Notice of Allowability in U.S. Appl. No. 13/619,237", Sep. 6, 2013, 4 pages.
- Notice of Allowance Dec. 27, 2011 for U.S. Appl. No. 10/816,217, filed Apr. 1, 2004.
- "Notice of Allowance mailed Mar. 6, 2014 for U.S. Appl. No. 13/827,653, filed Mar. 14, 2013".
- "Notice of Allowance mailed Nov. 10, 2011 for U.S. Appl. No. 11/906,702, filed Oct. 2, 2007".
- "Notice of Allowance mailed Nov. 13, 2013 for U.S. Appl. No. 13/724,048, filed Dec. 21, 2012".
- "Notice of Allowance mailed Jan. 21, 2013 for U.S. Appl. No. 13/298,090, filed Nov. 16, 2011".
- "Notice of Allowance mailed Oct. 5, 2012 for U.S. Appl. No. 13/204,511, filed Aug. 5, 2011".
- Park S., et al., "Group Synchronization in MultiCast Media Communications," Proceedings of the 5th Research on Multicast Technology Workshop, 2003.
- "Polycom Conference Composer manual: copyright 2001".
- "Final Office Action mailed Mar. 27, 2014 for U.S. Appl. No. 13/533,105, filed Jun. 26, 2012".
- "Non-Final Office Action mailed May 1, 2014 for U.S. Appl. No. 14/184,522, filed Feb. 19, 2014".
- "Non-Final Office Action mailed May 6, 2014 for U.S. Appl. No. 13/705,176, filed Dec. 5, 2012".
- "Non-Final Office Action mailed May 12, 2014 for U.S. Appl. No. 14/184,528, filed Feb. 19, 2014".
- "Non-Final Office Action mailed May 14, 2014 for U.S. Appl. No. 13/848,932, filed Mar. 22, 2013".
- "Advisory Action mailed on Nov. 12, 2014, issued in connection with U.S. Appl. No. 13/907,666, filed May 31, 2013, 6 pages".
- "Advisory Action mailed on Nov. 26, 2014, issued in connection with U.S. Appl. No. 14/186,850, filed Feb. 21, 2014, 9 pages".
- "Advisory Action mailed on Jan. 8, 2015, issued in connection with U.S. Appl. No. 13/705,176, filed Dec. 5, 2012, 4 pages".
- "Crown PIP Manual available for sale at least 2004, 68 pages".
- "Final Office Action mailed on Dec. 17, 2014, issued in connection with U.S. Appl. No. 13/533,105, filed Jun. 26, 2012, 36 pages".
- "Final Office Action mailed on Dec. 3, 2014, issued in connection with U.S. Appl. No. 14/184,528, filed Feb. 19, 2014, 12 pages".
- "Final Office Action mailed on Jan. 7, 2015, issued in connection with U.S. Appl. No. 13/848,932, filed Mar. 22, 2013, 14 pages".
- "Non-Final Office Action mailed on Dec. 1, 2014, issued in connection with U.S. Appl. No. 14/516,867, filed Oct. 17, 2014, 11 pages".
- "Non-Final Office Action mailed on Nov. 17, 2014, issued in connection with U.S. Appl. No. 13/864,247, filed Apr. 17, 2013, 11 pages".
- "Non-Final Office Action mailed on Nov. 18, 2014, issued in connection with U.S. Appl. No. 13/435,739, filed Mar. 30, 2012, 10 pages".
- "Non-Final Office Action mailed on Nov. 19, 2014, issued in connection with U.S. Appl. No. 13/848,921, filed Mar. 22, 2013, 9 pages".
- "Renkus Heinz Manual; available for sale at least 2004, 6 pages".
- "Advisory Action mailed Sep. 18, 2008 for U.S. Appl. No. 10/816,217, filed Apr. 1, 2004, 8 pages".
- "Advisory Action mailed Sep. 5, 2014 for U.S. Appl. No. 13/907,666, filed May 31, 2013, 3 pages".
- "Bluetooth. "Specification of the Bluetooth System: The ad hoc SCATTERNET for affordable and highly functional wireless connectivity" Core, Version 1.0 A, Jul. 26, 1999, 1068 pages".
- "Bluetooth. "Specification of the Bluetooth System: Wireless connections made easy" Core, Version 1.0 B, Dec. 1, 1999, 1076 pages".
- "Dell, Inc. "Dell Digital Audio Receiver: Reference Guide" Jun. 2000, 70 pages".
- "Dell, Inc. "Start Here" Jun. 2000, 2 pages".
- "Final Office Action mailed Jun. 5, 2014 for U.S. Appl. No. 13/907,666, filed May 31, 2013".
- "Final Office Action mailed on Oct. 22, 2014, issued in connection with U.S. Appl. No. 14/186,850, filed Feb. 21, 2014, 12 pages".
- "Final Office Action mailed on Oct. 23, 2014, issued in connection with U.S. Appl. No. 13/705,176, filed Dec. 5, 2012, 23 pages".

US 9,195,258 B2

Page 6

(56)

References Cited

OTHER PUBLICATIONS

"Japanese Intellectual Property Office, "Decision of Rejection," issued in connection with Japanese patent application No. 2012-178711, mailed on Jul. 4, 2014, 3 pages".

"Japanese Intellectual Property Office, "Office Action Summary," issued in connection with Japanese patent application No. 2012-178711, mailed on Nov. 19, 2013, 5 pages".

"Jones, Stephen. "Dell Digital Audio Receiver: Digital upgrade for your analog stereo" Analog Stereo. Jun. 24, 2000 <<http://www.reviewsonline.com/articles/961906864.htm>> retrieved Jun. 18, 2014, 2 pages".

"Loudback, Jim. "Affordable Audio Receiver Furnishes Homes With MP3" TechTV Vault. Jun. 28, 2000 <<http://www.g4tv.com/articles/17923/affordable-audio-receiver-furnishes-homes-with-mp3/>> retrieved Jul. 10, 2014, 2 pages".

"Non-Final Office Action mailed Jan. 5, 2012 for U.S. Appl. No. 13/298,090, filed Nov. 16, 2011, 40 pages".

"Non-Final Office Action mailed Jun. 17, 2014 for U.S. Appl. No. 14/176,808, filed Feb. 10, 2014".

"Non-Final Office Action mailed Dec. 18, 2013 for U.S. Appl. No. 13/907,666, filed May 31, 2013".

"Non-Final Office Action mailed Apr. 19, 2010 for U.S. Appl. No. 11/801,468, filed May 9, 2007, 16 pages".

"Non-Final Office Action mailed Jul. 25, 2014 for U.S. Appl. No. 14/184,526, filed Feb. 19, 2014".

"Non-Final Office Action mailed May 27, 2014 for U.S. Appl. No. 14/186,850, filed Feb. 21, 2014".

"Non-Final Office Action mailed Nov. 29, 2010 for U.S. Appl. No. 11/801,468, filed May 9, 2007, 17 pages".

"Non-Final Office Action mailed Jul. 31, 2014 for U.S. Appl. No. 13/533,105, filed Jun. 26, 2012".

"Non-Final Office Action mailed on Oct. 23, 2014, issued in connection with U.S. Appl. No. 13/848,904, filed Mar. 22, 2013, 11 pages".

"Non-Final Office Action mailed on Oct. 23, 2014, issued in connection with U.S. Appl. No. 13/864,251, filed Apr. 17, 2013, 11 pages".

"Non-Final Office Action mailed on Oct. 23, 2014, issued in connection with U.S. Appl. No. 13/888,203, filed May 6, 2013, 9 pages".

"Non-final Office Action mailed on Oct. 24, 2014, issued in connection with U.S. Appl. No. 13/435,776, filed Mar. 30, 2012, 14 pages".

"Notice of Allowance mailed May 6, 2011 for U.S. Appl. No. 11/801,468, filed May 9, 2007, 10 pages".

"Notice of Allowance mailed on Sep. 25, 2014, issued in connection with U.S. Appl. No. 14/176,808, filed Feb. 10, 2014, 5 pages".

"Palm, Inc. "Handbook for the Palm VII Handheld" May 2000, 311 pages".

"Welcome. You're watching Apple TV." Apple TV 1st Generation Setup Guide, Apr. 8, 2008 <http://manuals.info.apple.com/MANUALS/0/MA403/en_US/Apple_TV_SetupGuide.pdf> Retrieved Oct. 14, 2014, 40 pages".

"Welcome. You're watching Apple TV." Apple TV 2nd Generation Setup Guide, Mar. 10, 2011 <http://manuals.info.apple.com/MANUALS/1000/MA1555/en_US/Apple_TV_2nd_gen_Setup_Guide.pdf> Retrieved Oct. 16, 2014, 35 pages".

"Welcome. You're watching Apple TV." Apple TV 3rd Generation Setup Guide, Mar. 16, 2012 <http://manuals.info.apple.com/MANUALS/1000/MA1607/en_US/apple_tv_3rd_gen_setup.pdf> Retrieved Oct. 16, 2014, 35 pages".

"Presentations at WinHEC 2000" May 2000, 138 pages.

"Yamaha DME Designer software manual: Copyright 2004, 482 pages".

"Advisory Action mailed on Apr. 15, 2015, issued in connection with U.S. Appl. No. 14/184,526, filed Feb. 19, 2014, 9 pages".

"Advisory Action mailed on Mar. 2, 2015, issued in connection with U.S. Appl. No. 13/848,932, filed Mar. 22, 2013, 3 pages".

"Advisory Action mailed on Mar. 25, 2015, issued in connection with U.S. Appl. No. 13/533,105, filed Jun. 26, 2012, 5 pages".

"Advisory Action mailed on Feb. 26, 2015, issued in connection with U.S. Appl. No. 14/184,528, filed Feb. 19, 2014, 3 pages".

"European Extended Search Report for Application No. 14181454.1 mailed on Mar. 31, 2015, 9 pages".

"Final Office Action mailed on Feb. 11, 2015, issued in connection with U.S. Appl. No. 14/184,526, filed Feb. 19, 2014, 13 pages".

"Final Office Action mailed on Feb. 12, 2015, issued in connection with U.S. Appl. No. 14/184,522, filed Feb. 19, 2014, 20 pages".

"Final Office Action mailed on Apr. 28, 2015, issued in connection with U.S. Appl. No. 14/186,850, filed Feb. 21, 2014, 20 pages".

"Final Office Action mailed on Mar. 3, 2015, issued in connection with U.S. Appl. No. 13/864,251, filed Apr. 17, 2013, 13 pages".

"Final Office Action mailed on Mar. 4, 2015, issued in connection with U.S. Appl. No. 13/848,904, filed Mar. 22, 2013, 16 pages".

"Final Office Action mailed on Mar. 5, 2015, issued in connection with U.S. Appl. No. 13/888,203, filed May 6, 2013, 13 pages".

"Final Office Action mailed on Mar. 9, 2015, issued in connection with U.S. Appl. No. 14/516,867, filed Oct. 17, 2014, 14 pages".

"International Bureau, "International Preliminary Report on Patentability" issued in connection with International Patent application No. PCT/US2013/046372, mailed Dec. 31, 2014, 5 pages".

"International Preliminary Report on Patentability and Written Opinion, issued by the International Searching Authority in connection with International Patent Application No. PCT/US2013/046386, mailed on Jan. 8, 2015, 8 pages".

"Non-Final Office Action mailed on Mar. 12, 2015, issued in connection with U.S. Appl. No. 13/705,174, filed Dec. 5, 2012, 13 pages".

"Non-Final Office Action mailed on Mar. 13, 2015, issued in connection with U.S. Appl. No. 13/705,177, filed Dec. 5, 2012, 15 pages".

"Non-Final Office Action mailed on Feb. 26, 2015, issued in connection with U.S. Appl. No. 14/186,850, filed Feb. 21, 2014, 25 pages".

"Non-Final Office Action mailed on Mar. 26, 2015, issued in connection with U.S. Appl. No. 14/184,528, filed Feb. 19, 2014, 18 pages".

"Non-Final Office Action mailed on Mar. 27, 2015, issued in connection with U.S. Appl. No. 13/705,178, filed Dec. 5, 2012, 14 pages".

"Non-Final Office Action mailed on Jan. 30, 2015, issued in connection with U.S. Appl. No. 14/504,812, filed Oct. 2, 2014, 13 pages".

"Non-Final Office Action mailed on Jan. 30, 2015, issued in connection with U.S. Appl. No. 14/290,493, filed May 29, 2014, 30 pages".

"Non-Final Office Action mailed on Mar. 4, 2015, issued in connection with U.S. Appl. No. 13/435,776, filed Mar. 30, 2012, 16 pages".

"Notice of Allowance mailed on May 19, 2015, issued in connection with U.S. Appl. No. 13/907,666, filed May 31, 2013, 7 pages".

"Pre-Interview First Office Action mailed on Mar. 10, 2015, issued in connection with U.S. Appl. No. 14/505,027, filed Oct. 2, 2014, 4 pages".

"Re-Exam Non-Final Office Action mailed on Apr. 22, 2015, issued in connection with U.S. Appl. No. 90/013,423, filed Jan. 5, 2015, 16 pages".

Advisory Action mailed on Jun. 1, 2015, issued in connection with U.S. Appl. No. 14/516,867, filed Oct. 17, 2014, 11 pages.

Baldwin, Roberto. "How-To: Setup iTunes DJ on Your Mac and iPhone", available at http://www.maclife.com/article/howtos/howto_setup_itunes_dj_your_mac_and_iphone, archived on Mar. 17, 2009, 4 pages.

Final Office Action mailed on Jun. 15, 2015, issued in connection with U.S. Appl. No. 14/184,522, filed Feb. 19, 2014, 25 pages.

Non-Final Office Action mailed on Jun. 12, 2015, issued in connection with U.S. Appl. No. 13/848,932, filed Mar. 22, 2013, 16 pages.

Non-Final Office Action mailed on Jun. 19, 2015, issued in connection with U.S. Appl. No. 13/533,105, filed Jun. 26, 2012, 38 pages.

Non-Final Office Action mailed on Jun. 23, 2015, issued in connection with U.S. Appl. No. 13/705,176, filed Dec. 5, 2012, 30 pages.

Non-Final Office Action mailed on Jun. 3, 2015, issued in connection with U.S. Appl. No. 14/564,544, filed Dec. 9, 2014, 7 pages.

Non-Final Office Action mailed on Jun. 4, 2015, issued in connection with U.S. Appl. No. 13/871,795, filed Apr. 26, 2013, 16 pages.

Notice of Allowance mailed on Jul. 2, 2015, issued in connection with U.S. Appl. No. 13/848,904, filed Mar. 22, 2013, 17 pages.

Notice of Allowance mailed on Jul. 2, 2015, issued in connection with U.S. Appl. No. 13/888,203, filed May 6, 2013, 19 pages.

Notice of Allowance mailed on Jul. 6, 2015, issued in connection with U.S. Appl. No. 13/297,000, filed Nov. 15, 2011, 24 pages.

US 9,195,258 B2

Page 7

(56)

References Cited**OTHER PUBLICATIONS**

Advisory Action mailed on Jul. 28, 2015, issued in connection with U.S. Appl. No. 14/184,522, filed Feb. 19, 2014, 7 pages.

Baudisch et al., "Flat Volume Control: Improving Usability by Hiding the Volume Control Hierarchy in the User Interface", 2004, 8 pages.

Chakrabarti et al., "A Remotely Controlled Bluetooth Enabled Environment", IEEE, 2004, pp. 77-81.

Schmandt et al., "Impromptu: Managing Networked Audio Applications for Mobile Users", 2004, 11 pages.

Final Office Action mailed on Aug. 10, 2015, issued in connection with U.S. Appl. No. 14/290,493, filed on May 29, 2014, 26 pages.

Final Office Action mailed on Aug. 11, 2015, issued in connection with U.S. Appl. No. 13/864,247, filed on Apr. 17, 2013, 15 pages.

Final Office Action mailed Jul. 15, 2015, issued in connection with U.S. Appl. No. 14/504,812, filed on Oct. 2, 2014, 18 pages.

Final Office Action mailed on Aug. 3, 2015, issued in connection with U.S. Appl. No. 13/848,921, filed on Mar. 22, 2013, 13 pages.

Fulton et al., "The Network Audio System: Make Your Application Sing (As Well As Dance)!", The X Resource, 1994, 14 pages.

Hans et al., "Interacting with Audio Streams for Entertainment and Communication", 2003, 7 pages.

Levergood et al., "AudioFile: A Network-Transparent System for Distributed Audio Applications", Digital Equipment Corporation, 1993, 109 pages.

Notice of Allowance mailed on Aug. 10, 2015, issued in connection with U.S. Appl. No. 13/848,904, filed Mar. 22, 2013, 9 pages.

Notice of Allowance mailed on Aug. 12, 2015, issued in connection with U.S. Appl. No. 13/435,739, filed on Mar. 30, 2012, 27 pages.

Notice of Allowance mailed on Jul. 13, 2015, issued in connection with U.S. Appl. No. 14/184,526, filed on Feb. 19, 2014, 22 pages.

Notice of Allowance mailed on Jul. 15, 2015, issued in connection with U.S. Appl. No. 13/705,174, filed on Dec. 5, 2012, 18 pages.

Notice of Allowance mailed on Jul. 17, 2015, issued in connection with U.S. Appl. No. 13/864,251, filed on Apr. 17, 2013, 20 pages.

Notice of Allowance mailed on Jul. 29, 2015, issued in connection with U.S. Appl. No. 13/359,976, filed on Jan. 27, 2012, 28 pages.

Notice of Allowance mailed on Jul. 29, 2015, issued in connection with U.S. Appl. No. 14/186,850, filed on Feb. 21, 2014, 9 pages.

Notice of Allowance mailed on Jul. 30, 2015, issued in connection with U.S. Appl. No. 13/705,178, filed Dec. 5, 2012, 18 pages.

Notice of Allowance mailed on Aug. 4, 2015, issued in connection with U.S. Appl. No. 14/516,867, filed on Oct. 17, 2014, 13 pages.

Notice of Allowance mailed on Aug. 5, 2015, issued in connection with U.S. Appl. No. 13/435,776, filed on Mar. 30, 2012, 26 pages.

Nutzel et al., "Sharing Systems for Future HiFi Systems", IEEE, 2004, 9 pages.

Re-Exam Final Office Action mailed on Aug. 5, 2015, issued in connection with U.S. Appl. No. 90/013,423, filed on Jan. 5, 2015, 25 pages.

* cited by examiner

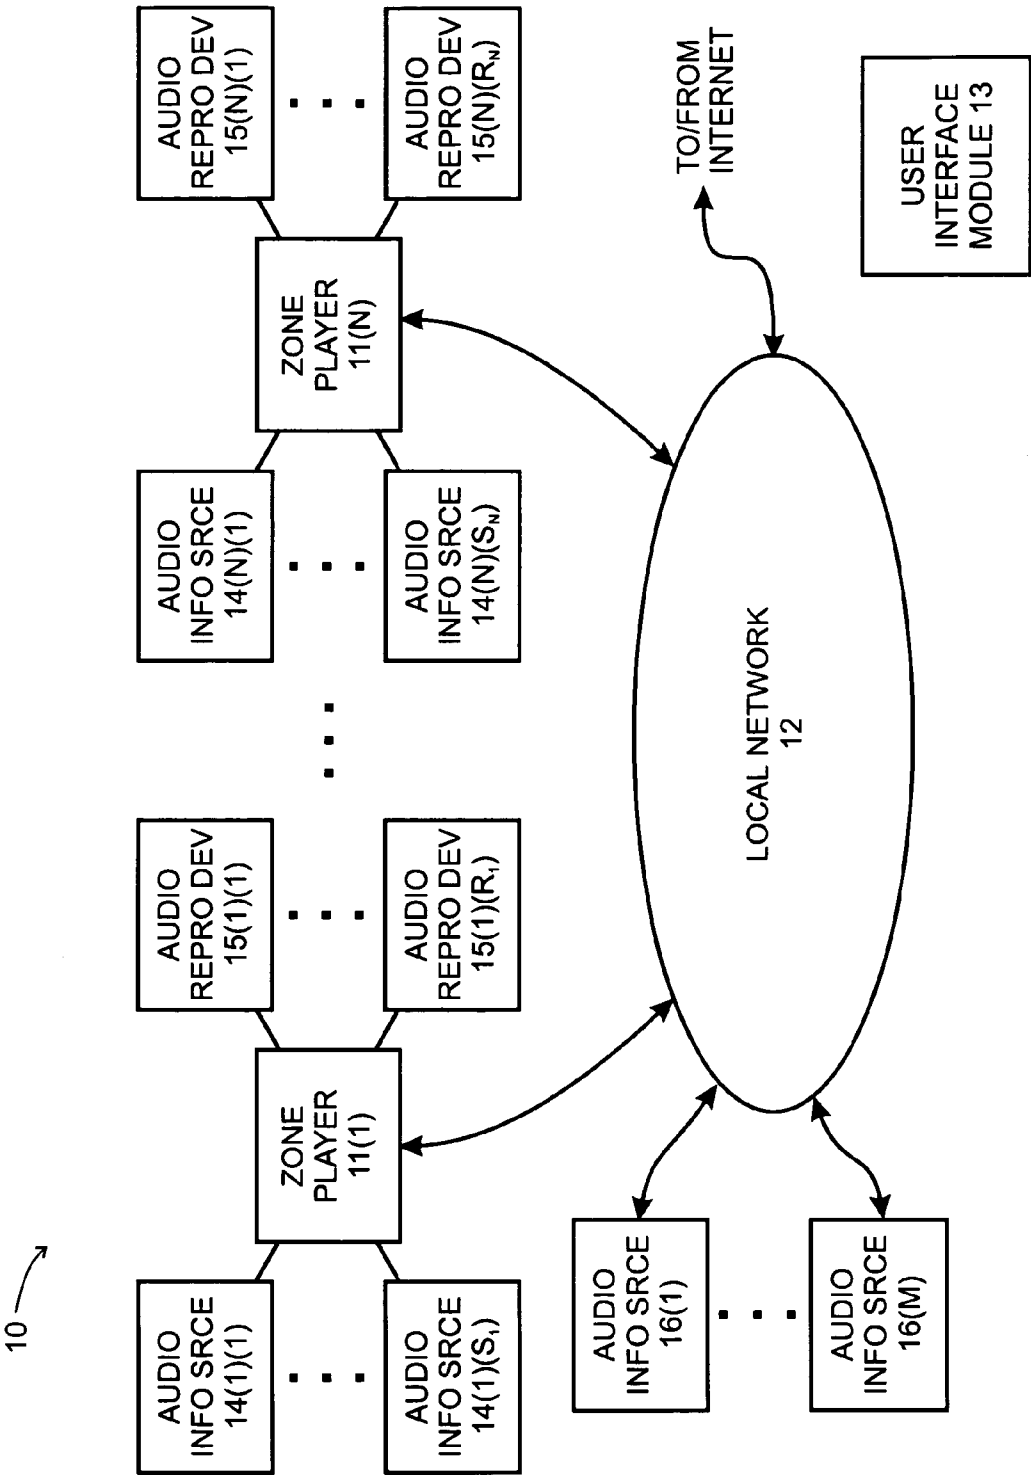
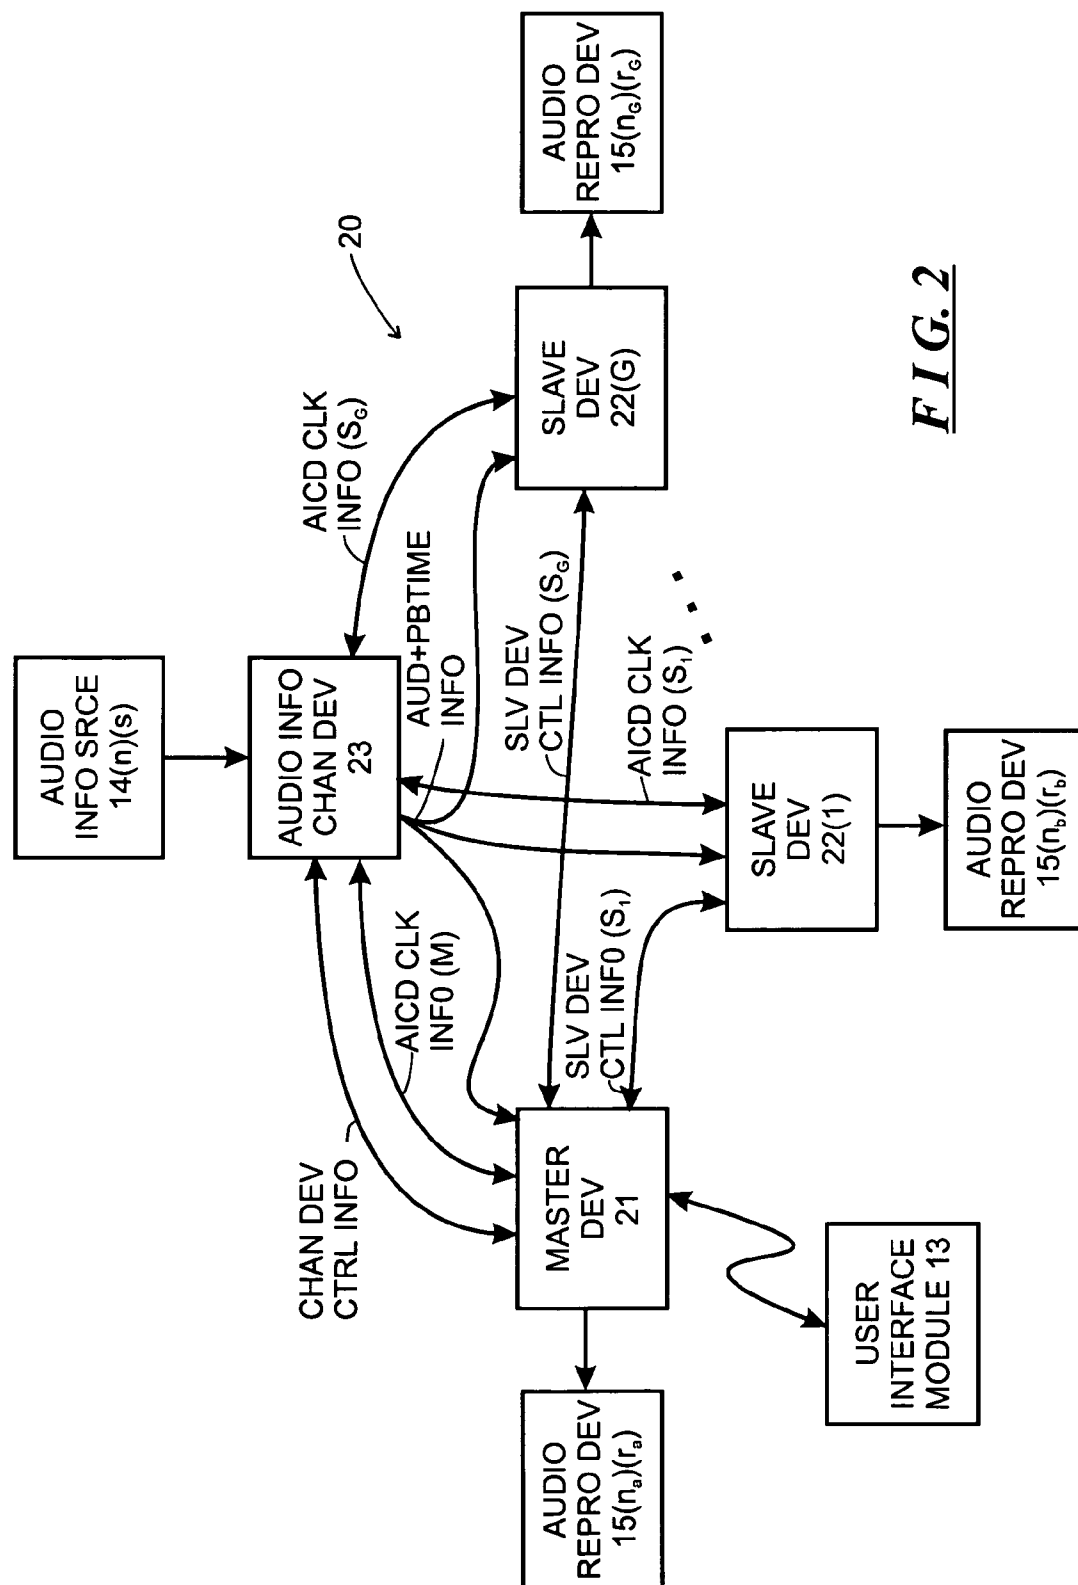
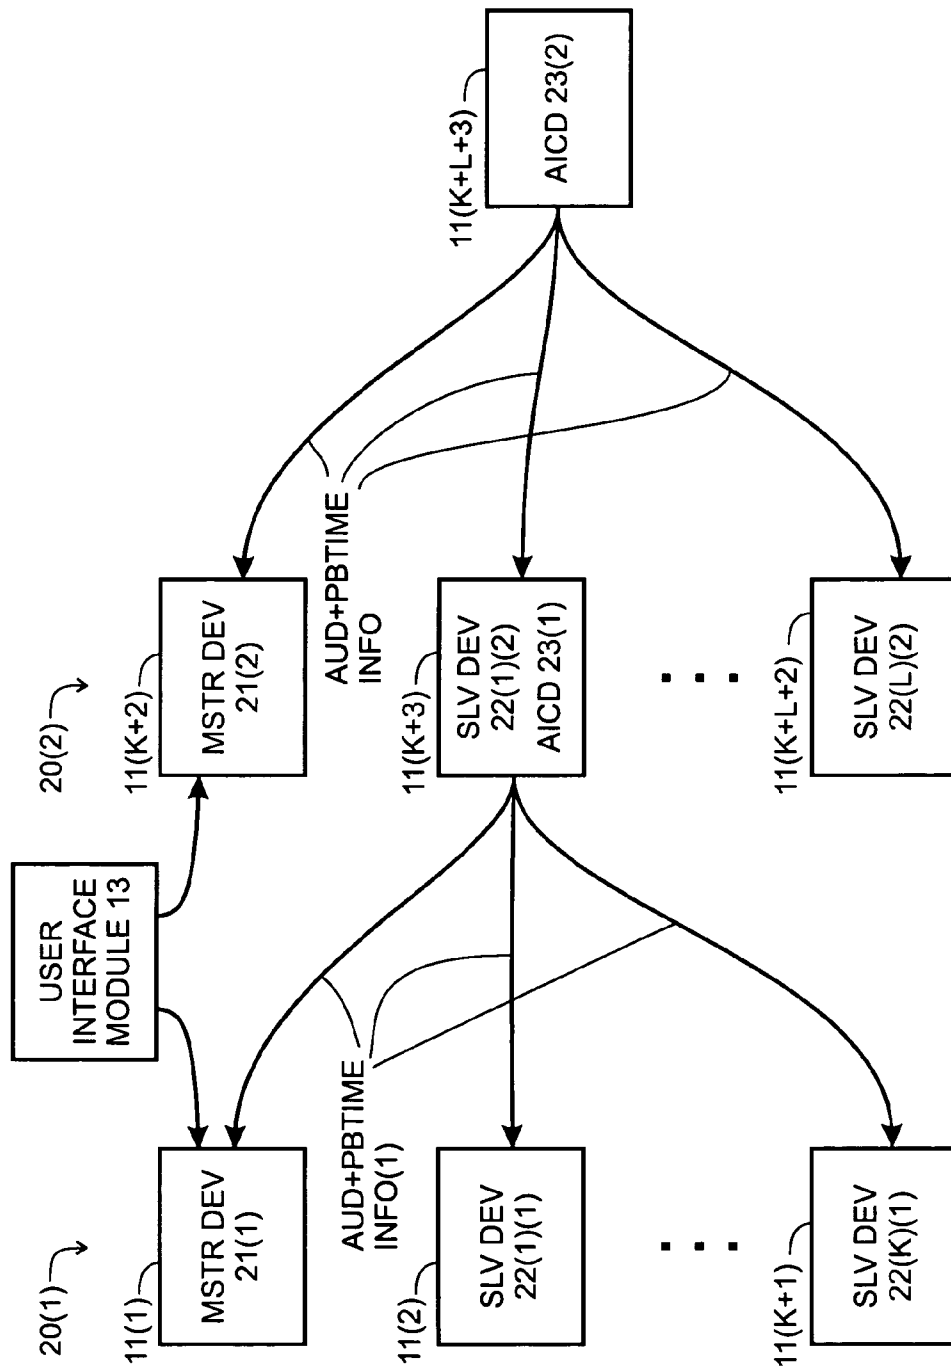
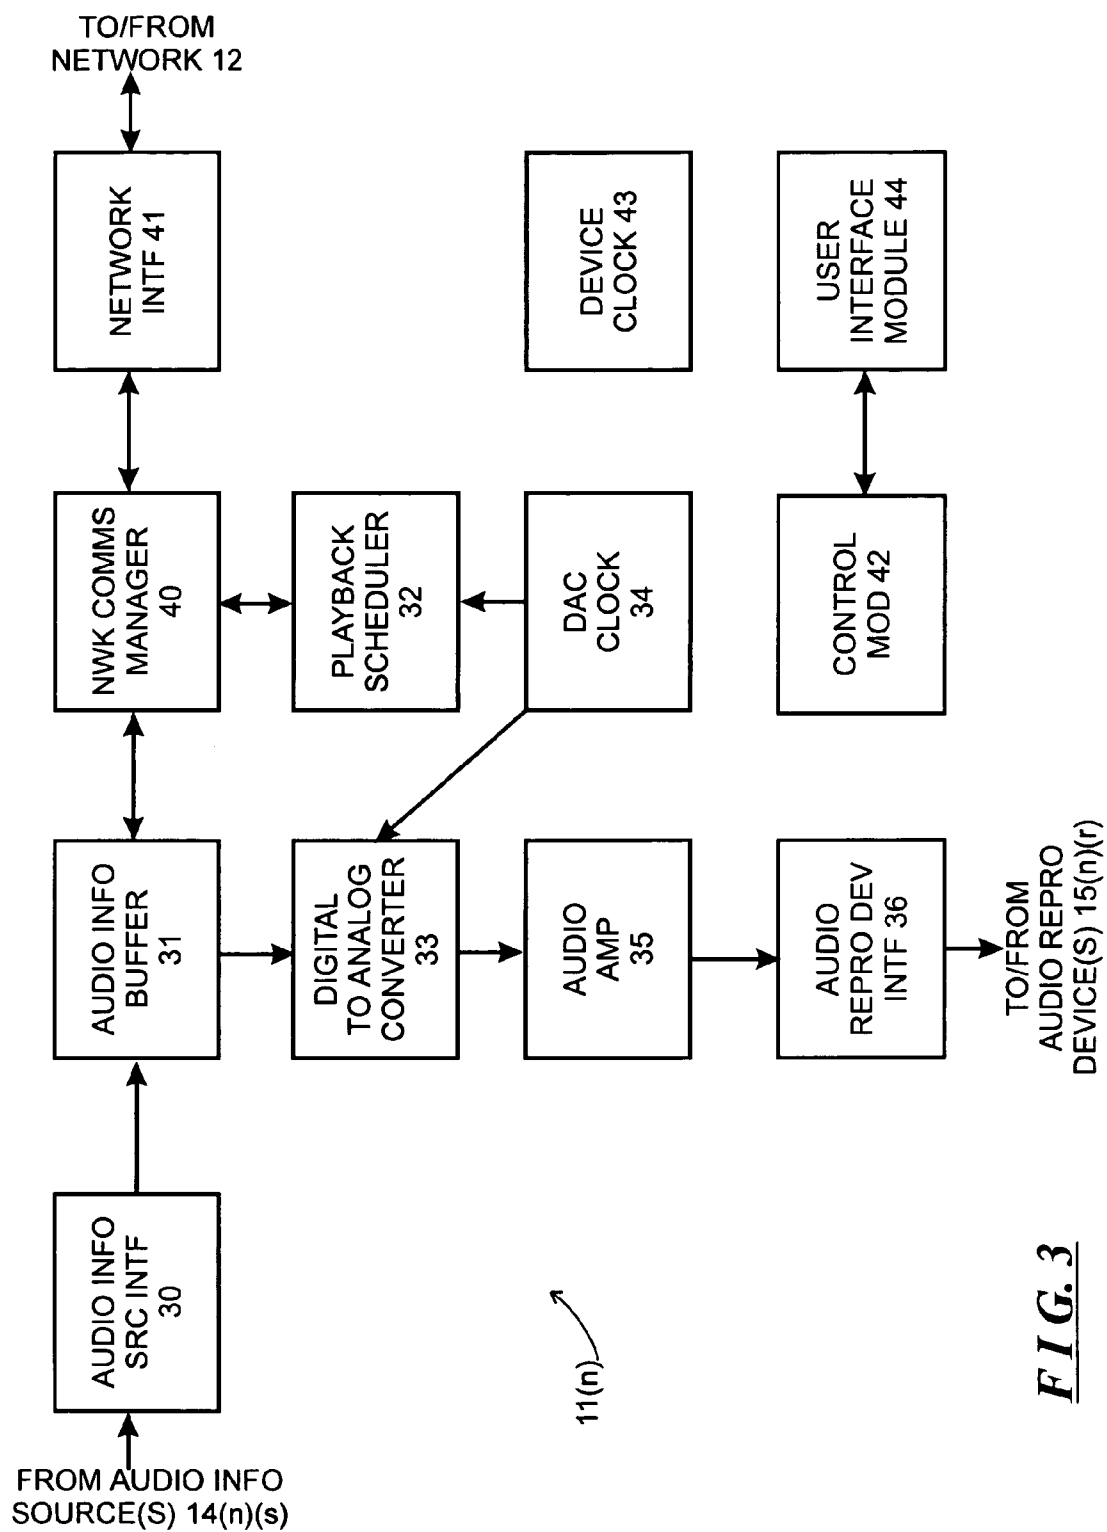


FIG. 1



**FIG. 2A**

**FIG. 3**

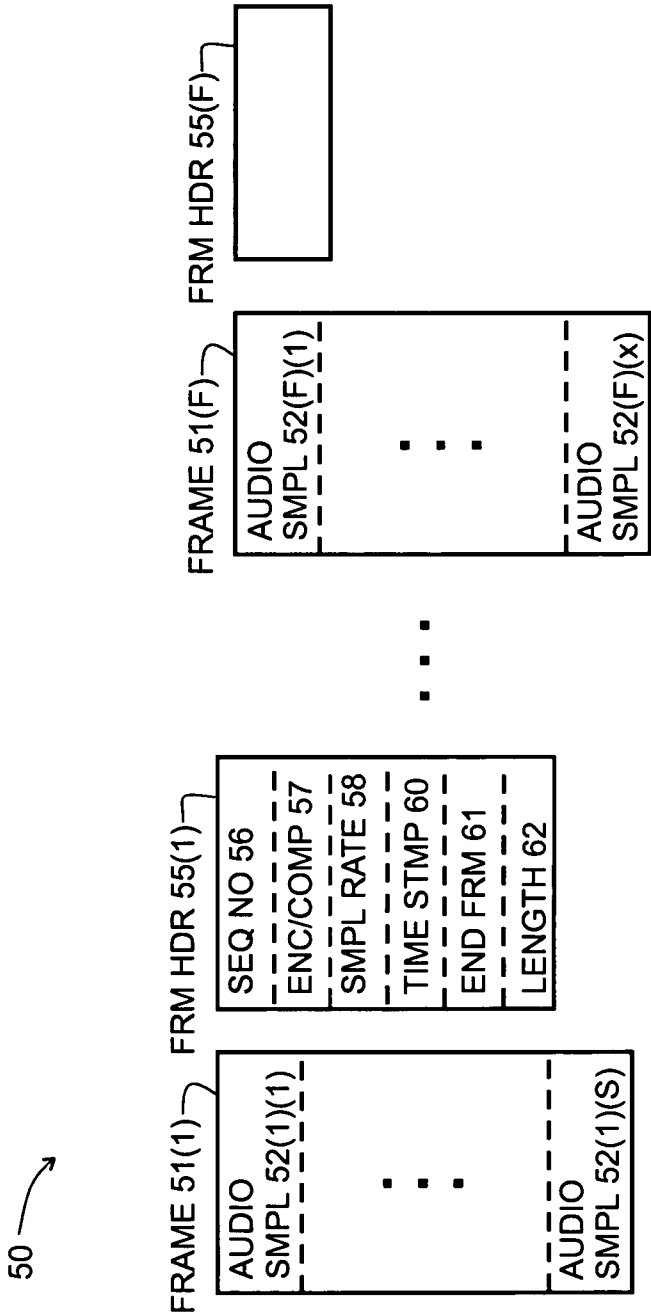


FIG. 4

US 9,195,258 B2

1

SYSTEM AND METHOD FOR SYNCHRONIZING OPERATIONS AMONG A PLURALITY OF INDEPENDENTLY CLOCKED DIGITAL DATA PROCESSING DEVICES

INCORPORATION BY REFERENCE

This application claims priority under 35 U.S.C. §120 to, and is a continuation of, U.S. Non-provisional patent application Ser. No. 13/864,251, filed Apr. 17, 2013, entitled "System and method for synchronizing operations among a plurality of independently clocked digital data processing devices," which claims priority under 35 U.S.C. §120 to, and is a continuation of, U.S. Non-provisional application Ser. No. 13/297,000, filed Nov. 15, 2011, entitled "Method for Synchronizing Audio Playback Between Multiple Networked Devices," which claims priority under 35 U.S.C. §120 to, and is a continuation of, U.S. Non-provisional application Ser. No. 10/816,217, now issued as U.S. Pat. No. 8,234,395, filed on Apr. 1, 2004, entitled "System and method for synchronizing operations among a plurality of independently clocked digital data processing devices," which claims priority under 35 U.S.C. §119 to U.S. Provisional Application Ser. No. 60/490,768, filed on Jul. 28, 2003, entitled "Method for Synchronizing Audio Playback Between Multiple Networked Devices," each of which are assigned to the assignee of the present application and are incorporated herein by reference.

FIELD OF THE INVENTION

The present invention relates generally to the field of digital data processing devices, and more particularly to systems and methods for synchronizing operations among a plurality of independently-clocked digital data processing devices. The invention is embodied in a system for synchronizing operations among a plurality of devices, in relation to information that is provided by a common source. One embodiment of the invention enables synchronizing of audio playback as among two or more audio playback devices that receive audio information from a common information source, or channel.

More generally, the invention relates to the field of arrangements that synchronize output generated by a number of output generators, including audio output, video output, combinations of audio and video, as well as other types of output as will be appreciated by those skilled in the art, provided by a common channel. Generally, the invention will find utility in connection with any type of information for which synchrony among independently-clocked devices is desired.

BACKGROUND OF THE INVENTION

There are a number of circumstances under which it is desirable to maintain synchrony of operations among a plurality of independently-clocked digital data processing devices in relation to, for example, information that is provided thereto by a common source. For example, systems are being developed in which one audio information source can distribute audio information in digital form to a number of audio playback devices for playback. The audio playback devices receive the digital information and convert it to analog form for playback. The audio playback devices may be located in the same room or they may be distributed in different rooms in a residence such as a house or an apartment, in different offices in an office building, or the like. For

2

example, in a system installed in a residence, one audio playback device may be located in a living room, while another audio playback device is located in a kitchen, and yet other audio playback devices may be located in various bedrooms of a house. In such an arrangement, the audio information that is distributed to various audio playback devices may relate to the same audio program, or the information may relate to different audio programs. If the audio information source provides audio information relating to the same audio program to two or more audio playback devices at the same time, the audio playback devices will generally contemporaneously play the same program. For example, if the audio information source provides audio information to audio playback devices located in the living room and kitchen in a house at the same time, they will generally contemporaneously play the same program.

One problem that can arise is to ensure that, if two or more audio playback devices are contemporaneously attempting to play back the same audio program, they do so simultaneously. Small differences in the audio playback devices' start times and/or playback speeds can be perceived by a listener as an echo effect, and larger differences can be very annoying. Differences can arise because for a number of reasons, including delays in the transfer of audio information over the network. Such delays can differ as among the various audio playback devices for a variety of reasons, including where they are connected into the network, message traffic and other reasons as will be apparent to those skilled in the art.

Another problem arises from the following. When an audio playback device converts the digital audio information from digital to analog form, it does so using a clock that provides timing information. Generally, the audio playback devices that are being developed have independent clocks, and, if they are not clocking at precisely the same rate, the audio playback provided by the various devices can get out of synchronization.

SUMMARY OF THE INVENTION

The invention provides a new and improved system and method for synchronizing operations among a number of digital data processing devices that are regulated by independent clocking devices. Generally, the invention will find utility in connection with any type of information for which synchrony among devices connected to a network is desired. The invention is described in connection with a plurality of audio playback devices that receive digital audio information that is to be played back in synchrony, but it will be appreciated that the invention can find usefulness in connection with any kind of information for which coordination among devices that have independent clocking devices would find utility.

In brief summary, the invention provides, in one aspect, a system for maintaining synchrony of operations among a plurality of devices that have independent clocking arrangements. The system includes a task distribution device that distributes tasks to a synchrony group comprising a plurality of devices that are to perform the tasks distributed by the task distribution device in synchrony. The task distribution device distributes each task to the members of the synchrony group over a network. Each task is associated with a time stamp that indicates a time, relative to a clock maintained by the task distribution device, at which the members of the synchrony group are to execute the task. Each member of the synchrony group periodically obtains from the task distribution device an indication of the current time indicated by its clock, determines a time differential between the task distribution

US 9,195,258 B2

3

device's clock and its respective clock and determines therefrom a time at which, according to its respective clock, the time stamp indicates that it is to execute the task.

In one embodiment, the tasks that are distributed include audio information for an audio track that is to be played by all of the devices comprising the synchrony group synchronously. The audio track is divided into a series of frames, each of which is associated with a time stamp indicating the time, relative to the clock maintained by an audio information channel device, which, in that embodiment, serves as the task distribution device, at which the members of the synchrony group are to play the respective frame. Each member of the synchrony group, using a very accurate protocol, periodically obtains the time indicated by the audio information channel device, and determines a differential between the time as indicated by its local clock and the audio information channel device's clock. The member uses the differential and the time as indicated by the time stamp to determine the time, relative to its local clock, at which it is to play the respective frame. The members of the synchrony group do this for all of the frames, and accordingly are able to play the frames in synchrony.

BRIEF DESCRIPTION OF THE DRAWINGS

This invention is pointed out with particularity in the appended claims. The above and further advantages of this invention may be better understood by referring to the following description taken in conjunction with the accompanying drawings, in which:

FIG. 1 schematically depicts an illustrative networked audio system, constructed in accordance with the invention;

FIG. 2 schematically depicts a functional block diagram of a synchrony group utilizing a plurality of zone players formed within the networked audio system depicted in FIG. 1;

FIG. 2A schematically depicts two synchrony groups, illustrating how a member of one synchrony group can provide audio information to the members of another synchrony group;

FIG. 3 depicts a functional block diagram of a zone player for use in the networked audio system depicted in FIG. 1; and

FIG. 4 is useful in understanding a digital audio information framing methodology useful in the network audio system depicted in FIG. 1.

DETAILED DESCRIPTION OF AN ILLUSTRATIVE EMBODIMENT

FIG. 1 depicts an illustrative network audio system 10 constructed in accordance with the invention. With reference to FIG. 1, the network audio system 10 includes a plurality of zone players 11(1) through 11(N) (generally identified by reference numeral 11(n)) interconnected by a local network 12, all of which operate under control of one or more user interface modules generally identified by reference numeral 13. One or more of the zone players 11(n) may also be connected to one or more audio information sources, which will generally be identified herein by reference numeral 14(n)(s), and/or one or more audio reproduction devices, which will generally be identified by reference numeral 15(n)(r). In the reference numeral 14(n)(s), index "n" refers to the index "n" of the zone player 11(n) to which the audio information source is connected, and the index "s" (s=1, . . . , S_n) refers to the "s-th" audio information source connected to that "n-th" zone player 11(n). Thus, if, for example, a zone player 11(n) is connected to four audio information sources 14(n)(1) through 14(n)(4), the audio information sources may be gen-

4

erally identified by reference numeral 14(n)(s), with S_n=4. It will be appreciated that the number of audio information sources S_n may vary as among the various zone players 11(n), and some zone players may not have any audio information sources connected thereto. Similarly, in the reference numeral 15(n)(r), index "n" refers to the index "n" of the zone player 11(n) to which the audio reproduction device is connected, and the index "r" (r=1, . . . , R_n) refers to the "r-th" audio information source connected to that "n-th" zone player 11(n). In addition to the audio information sources 14(n)(s), the network audio system 10 may include one or more audio information sources 16(1) through 16(M) connected through appropriate network interface devices (not separately shown) to the local network 12. Furthermore, the local network may include one or more network interface devices (also not separately shown) that are configured to connect the local network 12 to other networks, including a wide area network such as the Internet, the public switched telephony network (PSTN) or other networks as will be apparent to those skilled in the art, over which connections to audio information sources may be established.

The zone players 11(n) associated with system 10 may be distributed throughout an establishment such as residence, an office complex, a hotel, a conference hall, an amphitheater or auditorium, or other types of establishments as will be apparent to those skilled in the art or the like. For example, if the zone players 11(n) and their associated audio information source(s) and/or audio reproduction device(s) are distributed throughout a residence, one, such as zone player 11(1) and its associated audio information source(s) and audio reproduction device(s) may be located in a living room, another may be located in a kitchen, another may be located in a dining room, and yet others may be located in respective bedrooms, to selectively provide entertainment in those rooms. On the other hand, if the zone players 11(n) and their associated audio information source(s) and/or audio reproduction device(s) are distributed throughout an office complex, one may, for example, be provided in each office to selectively provide entertainment to the employees in the respective offices. Similarly, if the zone players 11(n) and associated audio information source(s) and/or audio reproduction device(s) are used in a hotel, they may be distributed throughout the rooms to provide entertainment to the guests. Similar arrangements may be used with zone players 11(n) and associated audio information source(s) and/or audio reproduction device(s) used in an amphitheater or auditorium. Other arrangements in other types of environments will be apparent to those skilled in the art. In each case, the zone players 11(n) can be used to selectively provide entertainment in the respective locations, as will be described below.

The audio information sources 14(n)(s) and 16(m) may be any of a number of types of conventional sources of audio information, including, for example, compact disc ("CD") players, AM and/or FM radio receivers, analog or digital tape cassette players, analog record turntables and the like. In addition, the audio information sources 14(n)(s) and 16(m) may comprise digital audio files stored locally on, for example, personal computers (PCs), personal digital assistants (PDAs), or similar devices capable of storing digital information in volatile or non-volatile form. As noted above, the local network 12 may also have an interface (not shown) to a wide area network, over which the network audio system 10 can obtain audio information. Moreover, one or more of the audio information sources 14(n)(s) may also comprise an interface to a wide area network such as the Internet, the public switched telephony network (PSTN) or any other source of audio information. In addition, one or more of the

US 9,195,258 B2

5

audio information sources **14(n)(s)** and **16(m)** may comprise interfaces to radio services delivered over, for example, satellite. Audio information obtained over the wide area network may comprise, for example, streaming digital audio information such as Internet radio, digital audio files stored on servers, and other types of audio information and sources as will be appreciated by those skilled in the art. Other arrangements and other types of audio information sources will be apparent to those skilled in the art.

Generally, the audio information sources **14(n)(s)** and **16(m)** provide audio information associated with audio programs to the zone players for playback. A zone player that receives audio information from an audio information source **14(n)(s)** that is connected thereto can provide playback and/or forward the audio information, along with playback timing information, over the local network **12** to other zone players for playback. Similarly, each audio information source **16(m)** that is not directly connected to a zone player can transmit audio information over the network **12** to any zone player **11(n)** for playback. In addition, as will be explained in detail below, the respective zone player **11(n)** can transmit the audio information that it receives either from an audio information source **14(n)(s)** connected thereto, or from an audio information source **16(m)**, to selected ones of the other zone players **11(n')**, **11(n'')**, . . . (n not equal to n', n'', . . .) for playback by those other zone players. The other zone players **11(n')**, **11(n'')**, . . . to which the zone player **11(n)** transmits the audio information for playback may be selected by a user using the user interface module **13**. In that operation, the zone player **11(n)** will transmit the audio information to the selected zone players **11(n')**, **11(n'')**, . . . over the network **12**. As will be described below in greater detail, the zone players **11(n)**, **11(n')**, **11(n'')**, . . . operate such that the zone players **11(n')**, **11(n'')**, . . . synchronize their playback of the audio program with the playback by the zone player **11(n)**, so that the zone players **11(n)**, **11(n')**, **11(n'')** provide the same audio program at the same time.

Users, using user interface module **13**, may also enable different groupings or sets of zone players to provide audio playback of different audio programs synchronously. For example, a user, using a user interface module **13**, may enable zone players **11(1)** and **11(2)** to play one audio program, audio information for which may be provided by, for example, one audio information source **14(1)(1)**. The same or a different user may, using the same or a different user interface module **13**, enable zone players **11(4)** and **11(5)** to contemporaneously play another audio program, audio information for which may be provided by a second audio information source, such as audio information source **14(5)(2)**. Further, a user may enable zone player **11(3)** to contemporaneously play yet another audio program, audio information for which may be provided by yet another audio information source, such as audio information source **16(1)**. As yet another possibility, a user may contemporaneously enable zone player **11(1)** to provide audio information from an audio information source connected thereto, such as audio information source **14(1)(2)**, to another zone player, such as zone player **11(6)** for playback.

In the following, the term-“synchrony group” will be used to refer to a set of one or more zone players that are to play the same audio program synchronously. Thus, in the above example, zone players **11(1)** and **11(2)** comprise one synchrony group, zone player **11(3)** comprises a second synchrony group, zone players **11(4)** and **11(5)** comprise a third synchrony group, and zone player **11(6)** comprises yet a fourth synchrony group. Thus, while zone players **11(1)** and **11(2)** are playing the same audio program, they will play the

6

audio program synchronously. Similarly, while zone players **11(4)** and **11(5)** are playing the same audio program, they will play the audio program synchronously. On the other hand, zone players that are playing different audio programs may do so with unrelated timings. That is, for example, the timing with which zone players **11(1)** and **11(2)** play their audio program may have no relationship to the timing with which zone player **11(3)**, zone players **11(4)** and **11(5)**, and zone player **11(6)** play their audio programs. It will be appreciated that, since “synchrony group” is used to refer to sets of zone players that are playing the same audio program synchronously, zone player **11(1)** will not be part of zone player **11(6)**’s synchrony group, even though zone player **11(1)** is providing the audio information for the audio program to zone player **11(6)**.

In the network audio system **10**, the synchrony groups are not fixed. Users can enable them to be established and modified dynamically. Continuing with the above example, a user may enable the zone player **11(1)** to begin providing playback of the audio program provided thereto by audio information source **14(1)(1)**, and subsequently enable zone player **11(2)** to join the synchrony group. Similarly, a user may enable the zone player **11(5)** to begin providing playback of the audio program provided thereto by audio information source **14(5)(2)**, and subsequently enable zone player **11(4)** to join that synchrony group. In addition, a user may enable a zone player to leave a synchrony group and possibly join another synchrony group. For example, a user may enable the zone player **11(2)** to leave the synchrony group with zone player **11(1)**, and join the synchrony group with zone player **11(6)**. As another possibility, the user may enable the zone player **11(1)** to leave the synchrony group with zone player **11(2)** and join the synchrony group with zone player **11(6)**. In connection with the last possibility, the zone player **11(1)** can continue providing audio information from the audio information source **14(1)(1)** to the zone player **11(2)** for playback thereby.

A user, using the user interface module **13**, can enable a zone player **11(n)** that is currently not a member of a synchrony group to join a synchrony group, after which it will be enabled to play the audio program that is currently being played by that synchrony group. Similarly, a user, also using the user interface module **13**, can enable a zone player **11(n)** that is currently a member of one synchrony group, to disengage from that synchrony group and join another synchrony group, after which that zone player will be playing the audio program associated with the other synchrony group. For example, if a zone player **11(6)** is currently not a member of any synchrony group, it, under control of the user interface module **13**, can become a member of a synchrony group, after which it will play the audio program being played by the other members of the synchrony group, in synchrony with the other members of the synchrony group. In becoming a member of the synchrony group, zone player **11(6)** can notify the zone player that is the master device for the synchrony group that it wishes to become a member of its synchrony group, after which that zone player will also transmit audio information associated with the audio program, as well as timing information, to the zone player **11(6)**. As the zone player **11(6)** receives the audio information and the timing information from the master device, it will play the audio information with the timing indicated by the timing information, which will enable the zone player **11(6)** to play the audio program in synchrony with the other zone player(s) in the synchrony group.

Similarly, if a user, using the user interface module **13**, enables a zone player **11(n)** associated with a synchrony group to disengage from that synchrony group, and if the zone

player 11(n) is not the master device of the synchrony group, the zone player 11(n) can notify the master device, after which the master device can terminate transmission of the audio information and timing information to the zone player 11(n). If the user also enables the zone player 11(n) to begin playing another audio program using audio information from an audio information source 14(n)(s) connected thereto, it will acquire the audio information from the audio information source 14(n)(s) and initiate playback thereof. If the user enables another zone player 11(n') to join the synchrony group associated with zone player 11(n), operations in connection therewith can proceed as described immediately above.

As yet another possibility, if a user, using the user interface module 13, enables a zone player 11(n) associated with a synchrony group to disengage from that synchrony group and join another synchrony group, and if the zone player is not the master device of the synchrony group from which it is disengaging, the zone player 11(n) can notify the master device of the synchrony group from which it is disengaging, after which that zone player will terminate transmission of audio information and timing information to the zone player 11(n) that is disengaging. Contemporaneously, the zone player 11(n) can notify the master device of the synchrony group that it (that is, zone player 11(n)) is joining, after which the master device can begin transmission of audio information and timing information to that zone player 11(n). The zone player 11(n) can thereafter begin playback of the audio program defined by the audio information, in accordance with the timing information so that the zone player 11(n) will play the audio program in synchrony with the master device.

As yet another possibility, a user, using the user interface module 13, may enable a zone player 11(n) that is not associated with a synchrony group, to begin playing an audio program using audio information provided to it by an audio information source 14(n)(s) connected thereto. In that case, the user, also using the user interface module 13 or a user interface device that is specific to the audio information source 14(n)(s), can enable the audio information source 14(n)(s) to provide audio information to the zone player 11(n). After the zone player 11(n) has begun playback, or contemporaneously therewith, the user, using the user interface module 13, can enable other zone players 11(n'), 11(n''), . . . to join zone player 11(n)'s synchrony group and enable that zone player 11(n) to transmit audio information and timing information thereto as described above, to facilitate synchronous playback of the audio program by the other zone players 11(n'), 11(n'') . . .

A user can use the user interface module 13 to control other aspects of the network audio system 10, including but not limited to the selection of the audio information source 14(n)(s) that a particular zone player 11(n) is to utilize, the volume of the audio playback, and so forth. In addition, a user may use the user interface module 13 to turn audio information source(s) 14(n)(s) on and off and to enable them to provide audio information to the respective zone players 11(n).

Operations performed by the various devices associated with a synchrony group will be described in connection with FIG. 2, which schematically depicts a functional block diagram of a synchrony group in the network audio system 10 described above in connection with FIG. 1. With reference to FIG. 2, a synchrony group 20 includes a master device 21 and zero or more slave devices 22(1) through 22(G) (generally identified by reference numeral 22(g)), all of which synchronously play an audio program provided by an audio information channel device 23. Each of the master device 21, slave

devices 22(g) and audio information channel device 23 utilizes a zone player 11(n) depicted in FIG. 1, although it will be clear from the description below that a zone player may be utilized both for the audio information channel device for the synchrony group 20, and the master device 21 or a slave device 22(g) of the synchrony group 20. As will be described below in more detail, the audio information channel device 23 obtains the audio information for the audio program from an audio information source, adds playback timing information, and transmits the combined audio and playback timing information to the master device 21 and slave devices 22(g) over the network 12 for playback. The playback timing information that is provided with the audio information, together with clock timing information provided by the audio information channel device 23 to the various devices 21 and 22(g) as will be described below, enables the master device 21 and slave devices 22(g) of the synchrony group 20 to play the audio information simultaneously.

The master device 21 and the slave devices 22(g) receive the audio and playback timing information, as well as the clock timing information, that are provided by the audio information channel device 23, and play back the audio program defined by the audio information. The master device 21 is also the member of the synchrony group 20 that communicates with the user interface module 13 and that controls the operations of the slave devices 22(g) in the synchrony group 20. In addition, the master device 21 controls the operations of the audio information channel device 23 that provides the audio and playback timing information for the synchrony group 20. Generally, the initial master device 21 for the synchrony group will be the first zone player 11(n) that a user wishes to play an audio program. However, as will be described below, the zone player 11(n) that operates as the master device 21 can be migrated from one zone player 11(n) to another zone player 11(n'), which preferably will be a zone player that is currently operating as a slave device 22(g) in the synchrony group.

In addition, under certain circumstances, as will be described below, the zone player 11(n) that operates as the audio information channel device 23 can be migrated from one zone player to another zone player, which also will preferably will be a zone player that is currently operating as a member of the synchrony group 20. It will be appreciated that the zone player that operates as the master device 21 can be migrated to another zone player independently of the migration of the audio information channel device 23. For example, if one zone player 11(n) is operating as both the master device 21 and the audio information channel device 23 for a synchrony group 20, the master device 21 can be migrated to another zone player 11(n') while the zone player 11(n) is still operating as the audio information channel device 23. Similarly, if one zone player 11(n) is operating as both the master device 21 and the audio information channel device 23 for a synchrony group 20, the audio information channel device 23 can be migrated to another zone player 11(n') while the zone player 11(n) is still operating as the master device 21. In addition, if one zone player 11(n) is operating as both the master device 21 and the audio information channel device 23 for a synchrony group 20, the master device 21 can be migrated to another zone player 11(n') and the audio information channel device can be migrated to a third zone player 11(n'').

The master device 21 receives control information from the user interface module 13 for controlling the synchrony group 20 and provides status information indicating the operational status of the synchrony group to the user interface module 13. Generally, the control information from the user interface

US 9,195,258 B2

9

module 13 enables the master device 21 to, in turn, enable the audio information channel device 23 to provide audio and playback timing information to the synchrony group to enable the devices 21 and 22(g) that are members of the synchrony group 20 to play the audio program synchronously. In addition, the control information from the user interface module 13 enables the master device 21 to, in turn, enable other zone players to join the synchrony group as slave devices 22(g) and to enable slave devices 22(g) to disengage from the synchrony group. Control information from the user interface module 13 can also enable the zone player 11(n) that is currently operating as the master device 21 to disengage from the synchrony group, but prior to doing so that zone player will enable the master device 21 to transfer from that zone player 11(n) to another zone player 11(n'), preferably to a zone player 11(n') that is currently a slave device 22(g) in the synchrony group 20. The control information from the user interface module 13 can also enable the master device 21 to adjust its playback volume and to enable individual ones of the various slave devices 22(g) to adjust their playback volumes. In addition, the control information from the user interface module 13 can enable the synchrony group 20 to terminate playing of a current track of the audio program and skip to the next track, and to re-order tracks in a play list of tracks defining the audio program that is to be played by the synchrony group 20.

The status information that the master device 21 may provide to the user interface module 13 can include such information as a name or other identifier for the track of the audio work that is currently being played, the names or other identifiers for upcoming tracks, the identifier of the zone player 11(n) that is currently operating as the master device 21, and identifiers of the zone players that are currently operating as slave devices 22(g). In one embodiment, the user interface module 13 includes a display (not separately shown) that can display the status information to the user.

It will be appreciated that the zone player 11(n) that is operating as the audio information channel device 23 for one synchrony group may also comprise the master device 21 or any of the slave devices 22(g) in another synchrony group. This may occur if, for example, the audio information source that is to provide the audio information that is to be played by the one synchrony group is connected to a zone player also being utilized as the master device or a slave device for the other synchrony group. This will be schematically illustrated below in connection with FIG. 2A. Since, as noted above, the zone player 11(n) that is operating as the audio information channel device 23 for the synchrony group 20 may also be operating as a master device 21 or slave device 22(g) for another synchrony group, it can also be connected to one or more audio reproduction devices 15(n)(r), although that is not depicted in FIG. 2. Since the master device 21 and slave devices 22(g) are all to provide playback of the audio program, they will be connected to respective audio reproduction devices 15(n)(r). Furthermore, it will be appreciated that one or more of the zone players 11(n) that operate as the master device 21 and slave devices 22(g) in synchrony group 20 may also operate as an audio information channel device for that synchrony group or for another synchrony group and so they may be connected to one or more audio information sources 14(n)(s), although that is also not depicted in FIG. 2. In addition, it will be appreciated that a zone player 11(n) can also operate as a audio information channel device 23 for multiple synchrony groups.

If the audio information channel device 23 does not utilize the same zone player as the master device 21, the master device 21 controls the audio information channel device by

10

exchanging control information over the network 12 with the audio information channel device 23. The control information is represented in FIG. 2 by the arrow labeled CHAN_DEV_CTRL_INFO. The control information that the master device 21 provides to the audio information channel device 23 will generally depend on the nature of the audio information source that is to provide the audio information for the audio program that is to be played and the operation to be enabled by the control information. If, for example, the audio information source is a conventional compact disc, tape, or record player, broadcast radio receiver, or the like, which is connected to a zone player 11(n), the master device 21 may merely enable the zone player serving as the audio information channel device 23 to receive the audio information for the program from the audio information source. It will be appreciated that, if the audio information is not in digital form, the audio information channel device 23 will convert it to digital form and provide the digitized audio information, along with the playback timing information, to the master device 21 and slave devices 22(g).

On the other hand, if the audio information source is, for example, a digital data storage device, such as may be on a personal computer or similar device, the master device 21 can provide a play list to the audio information channel device 23 that identifies one or more files containing the audio information for the audio program. In that case, the audio information channel device 23 can retrieve the files from the digital data storage device and provide them, along with the playback timing information, to the master device 21 and the slave devices 22(g). It will be appreciated that, in this case, the audio information source may be directly connected to the audio information channel device 23, as, for example, an audio information source 14(n)(s), or it may comprise an audio information source 16(m) connected to the network 12. As a further alternative, if the audio information source is a source available over the wide area network, the master device 21 can provide a play list comprising a list of web addresses identifying the files containing the audio information for the audio program that is to be played, and in that connection the audio information channel device 23 can initiate a retrieval of the files over the wide area network. As yet another alternative, if the audio information source is a source of streaming audio received over the wide area network, the master device 21 can provide a network address from which the streaming audio can be received. Other arrangements by which the master device 21 can control the audio information channel device 23 will be apparent to those skilled in the art.

The master device 21 can also provide control information to the synchrony group's audio information channel device 23 to enable a migration from one zone player 11(n) to another zone player 11(n'). This may occur if, for example, the audio information source is one of audio information sources 16 or a source accessible over the wide area network via the network 12. The master device 21 can enable migration of the audio information channel device 23 for several reasons, including, for example, to reduce the loading of the zone player 11(n), to improve latency of message transmission in the network 12, and other reasons as will be appreciated by those skilled in the art.

As noted above, the audio information channel device 23 provides audio and playback timing information for the synchrony group to enable the master device 21 and slave devices 22(g) to play the audio program synchronously. Details of the audio and playback timing information will be described in detail below in connection with FIGS. 3 and 4, but, in brief, the audio information channel device 23 transmits the audio and playback timing information in messages over the net-

US 9,195,258 B2

11

work 12 using a multi-cast message transmission methodology. In that methodology, the audio information channel device 23 will transmit the audio and playback timing information in a series of messages, with each message being received by all of the zone players 11(n) comprising the synchrony group 20, that is, by the master device 21 and the slave devices 22(g). Each of the messages includes a multi-cast address, which the master device 21 and slave devices 22(g) will monitor and, when they detect a message with that address, they will receive and use the contents of the message. The audio and playback timing information is represented in FIG. 2 by the arrow labeled "AUD+PBTIME_INFO," which has a single tail, representing a source for the information at the audio information channel device 23, and multiple arrowheads representing the destinations of the information, with one arrowhead extending to the master device 21 and other arrowheads extending to each of the slave devices 22(g) in the synchrony group 20. The audio information channel device 23 may make use of any convenient multi-cast message transmission methodology in transmitting the audio and playback timing information to the synchrony group 20. As will be described in detail in connection with FIG. 4, the audio and playback timing information is in the form of a series of frames, with each frame having a time stamp. The time stamp indicates a time, relative to the time indicated by a clock maintained by the audio information channel device 23, at which the frame is to be played. Depending on the size or sizes of the messages used in the selected multi-cast message transmission methodology and the size or sizes of the frames, a message may contain one frame, or multiple frames, or, alternatively, a frame may extend across several messages.

The audio information channel device 23 also provides clock time information to the master device 21 and each of the slave devices 22(g) individually over network 12 using a highly accurate clock time information transmission methodology. The distribution of the clock time information is represented in FIG. 2 by the arrows labeled "AICD_CLK_INF (M)" (in the case of the clock time information provided to the master device 21) and "AICD_CLK_INF (S_i)" through "AICD_CLK_INF (S_G)" (in the case of audio information channel device clock information provided to the slave devices 22(g)). In one embodiment, the master device 21 and slave devices 22(g) make use of the well-known SNTP (Simple Network Time Protocol) to obtain current clock time information from the audio information channel device 23. The SNTP makes use of a unicast message transfer methodology, in which one device, such as the audio information channel device 23, provides clock time information to a specific other device, such as the master device 21 or a slave device 22(g), using the other device's network, or unicast, address. Each of the master device 21 and slave devices 22(g) will periodically initiate SNTP transactions with the audio information channel device 23 to obtain the clock time information from the audio information channel device 23. As will be described below in more detail, the master device 21 and each slave device 22(g) make use of the clock time information to determine the time differential between the time indicated by the audio information channel device's clock and the time indicated by its respective clock, and use that time differential value, along with the playback time information associated with the audio information and the respective device's local time as indicated by its clock to determine when the various frames are to be played. This enables the master device 21 and the slave devices 22(g) in the synchrony group 20 to play the respective frames simultaneously.

As noted above, the control information provided by the user to the master device 21 through the user interface module

12

13 can also enable the master device 21 to, in turn, enable another zone player 11(n') to join the synchrony group as a new slave device 22(g). In that operation, the user interface module 13 will provide control information, including the identification of the zone player 11(n') that is to join the synchrony group to the master device 21. After it receives the identification of the zone player 11(n') that is to join the synchrony group, the master device 21 will exchange control information, which is represented in FIG. 2 by the arrows labeled SLV_DEV_CTRL_INF (S_i) through SLV_DEV_CTRL_INF (S_G) group slave control information, over the network 12 with the zone player 11(n') that is identified in the control information from the user interface module 13. The control information that the master device 21 provides to the new zone player 11(n') includes the network address of the zone player 11(n) that is operating as the audio information channel device 23 for the synchrony group, as well as the multi-cast address that the audio information channel device 23 is using to broadcast the audio and playback timing information over the network. The zone player that is to operate as the new slave device 22(g') uses the multi-cast address to begin receiving the multi-cast messages that contain the audio information for the audio program being played by the synchrony group.

It will be appreciated that, if the zone player 11(n) that is operating as the master device 21 for the synchrony group 20 is also operating the audio information channel device 23, and if there are no slave devices 22(g) in the synchrony group 20, the audio information channel device 23 may not be transmitting audio and playback timing information over the network. In that case, if the new slave device 22(g') is the first slave device in the synchrony group, the zone player 11(n) that is operating as both the master device 21 and audio information channel device 23, can begin transmitting the audio and playback timing information over the network 12 when the slave device 22(g') is added to the synchrony group 20. The zone player 11(n) can maintain a count of the number of slave devices 22(g) in the synchrony group 20 as they join and disengage, and, if the number drops to zero, it can stop transmitting the audio and playback timing information over the network 12 to reduce the message traffic over the network 12.

The new slave device 22(g') added to the synchrony group 20 uses the network address of the audio information channel device 23 for several purposes. In particular, the new slave device 22(g') will, like the master device 21 (assuming the zone player 11(n) operating as the master device 21 is not also the audio information channel device 23), engage in SNTP transactions with the audio information channel device 23 to obtain the clock timing information from the audio information channel device 23. In addition, the new slave device 22(g') can notify the audio information channel device 23 that it is a new slave device 22(g') for the synchrony group 20 and provide the audio information channel device 23 with its network address. As will be described below, in one embodiment, particularly in connection with audio information obtained from a source, such as a digital data storage device, which can provide audio information at a rate that is faster than the rate at which it will be played, the audio information channel device 23 will buffer audio and timing information and broadcast it over the network 12 to the synchrony group 20 generally at a rate at which it is provided by the source. Accordingly, when a new slave device 22(g') joins the synchrony group 20, the playback timing information may indicate that the audio information that is currently being broadcast by the audio information channel device 23 using the multi-cast methodology is to be played back some time in the

US 9,195,258 B2

13

future. To reduce the delay with which the new slave device 22(g') will begin playback, the audio information channel device 23 can also retransmit previously transmitted audio and timing information that it had buffered to the new slave device 22(g') using the unicast network address of the slave device 22(g').

The master device 21 can also use the slave device control information exchanged with the slave devices 22(g) for other purposes. For example, the master device 21 can use the slave device control information to initiate a migration of the master from its zone player 11(n) to another zone player 11(n'). This may occur for any of a number of reasons, including, for example, that the master device 21 is terminating playback by it of the audio program and is leaving the synchrony group 20, but one or more of the other devices in the synchrony group is to continue playing the audio program. The master device 21 may also want to initiate a migration if it is overloaded, which can occur if, for example, the zone player 11(n) that is the master device 21 for its synchrony group is also operating as an audio information channel device 23 for another synchrony group.

The user can also use the user interface module 13 to adjust playback volume by the individual zone players 11(n) comprising the synchrony group. In that operation, the user interface module 13 provides information identifying the particular device whose volume is to be adjusted, and the level at which the volume is to be set to the master device 21. If the device whose volume is to be adjusted is the master device 21, the master device 21 can adjust its volume according to the information that it receives from the user interface module 13. On the other hand, if the device whose volume is to be adjusted is a slave device 22(g), the master device 21 can provide group slave control information to the respective slave device 22(g), to enable it to adjust its volume.

The user can also use the user interface module 13 to enable a synchrony group 20 to cancel playing of the track in an audio program that is currently being played, and to proceed immediately to the next track. This may occur, for example, if the tracks for the program is in the form of a series of digital audio information files, and the user wishes to cancel playback of the track that is defined by one of the files. In that case, when the master device 21 receives the command to cancel playback of the current track, it will provide channel device control information to the audio information channel device 23 so indicating. In response, the audio information channel device 23 inserts control information into the audio and playback timing information, which will be referred to as a "resynchronize" command. In addition, the audio information channel device 23 will begin transmitting audio information for the next track, with timing information to enable it to be played immediately. The resynchronize command can also enable playback of a track to be cancelled before it has been played. Details of these operations will be described below.

As noted above, there may be multiple synchrony groups in the network audio system 10, and further that, for example, a zone player 11(n) may operate both as a master device 21 or a slave device 22(g) in one synchrony group, and as the audio information channel device 23 providing audio and playback timing information and clock timing information for another synchrony group. An illustrative arrangement of this will be described in connection with FIG. 2A. With reference to FIG. 2A, that FIG. depicts elements of two synchrony groups, identified by reference numerals 20(1) and 20(2), respectively. For clarity, FIG. 2A does not show a number of elements, the presence of which would be evident from FIGS. 1 and 2 as described above. For example, FIG. 2A does not depict the audio information sources from which audio infor-

14

mation is obtained for the synchrony groups or the audio reproduction devices that are used to produce sound for the master and slave devices, which are depicted in both FIGS. 1 and 2. In addition, FIG. 2A does not depict arrows that represent control information provided by the respective master devices to the slave devices in the respective synchrony groups, or to the audio information channel devices that provide audio and timing information for the respective synchrony groups, which are depicted in FIG. 2. In addition, FIG. 2A does not depict the arrows that represent the clock timing information provided by the audio information channel devices to the respective members of the respective synchrony groups, which are also depicted in FIG. 2. As will be noted below, however, FIG. 2A does depict arrows representing the audio and playback timing information provided by the respective audio information channel devices for the respective synchrony groups 20(1), 20(2), to the master and slave devices comprising the respective synchrony groups 20(1), 20(2).

Each synchrony group 20(1), 20(2) comprises elements of a number of zone players. A functional block diagram of a zone player will be described below in connection with FIG. 3. Synchrony group 20(1) includes a master device 21(1) and "K" slave devices 22(1)(1) through 22(K)(1) (the index "1" in reference numeral 21(1) and the last index in reference numeral 22(1)(1) through 21(K)(1) corresponds to the index of the synchrony group 20(1) to which they belong) utilize zone players 11(1) and 11(K+1) respectively. Similarly, synchrony group 20(2) includes a master device 21(2) and "L" slave devices 22(1)(2) through 22(L)(2) that utilize zone players 11(K+2) through 11(K+L+2). In the illustrative arrangement depicted in FIG. 2A, both synchrony groups 20(1) and 20(2) are controlled by the user interface module 13, which can provide control information to, and receive status information from, the master devices 21(1) and 21(2) independently. It will be appreciated that separate user interface modules may be provided to provide control information to, and receive status information from, the respective master devices 21(1), 21(2).

As noted above, the slave device 22(1)(2) in synchrony group 20(2) utilizes zone player 11(K+3). In the illustrative arrangement depicted in FIG. 2A, the audio information channel device 23(1) that provides audio and playback timing information to the master and slave devices 21(1), 22(1)(1), . . . , 22(K)(1) of synchrony group 20(1) also utilizes zone player 11(K+3). As noted above, this may occur if, for example, the audio information source that is to provide audio information to be played by the synchrony group 20(1) is connected to the zone player 11(K+3). Thus, when the master device 21(1) of synchrony group 20(1) exchanges channel device control information with the audio information channel device 23(1), it is effectively exchanging channel device control information with the zone player 11(K+3). Similarly, when the master and slave devices 21(1), 22(1)(1), . . . , 22(K)(1) of synchrony group 20(1) receive audio and playback timing information, as well as clock timing information, from the audio information channel device 23(1), they are effectively receiving the information from the zone player 11(K+3). FIG. 2A depicts a multi-headed arrow representing audio and playback timing information transmitted by the zone player 11(K+3), as audio information channel device 23(1), to the master and slave devices 21(1), 22(1)(1), . . . , 11(K)(1) comprising synchrony group 20(1).

On the other hand, in the illustrative arrangement depicted in FIG. 2A, the synchrony group 20(2) utilizes a zone player 11(K+L+3) as its audio information channel device 23(2). As with synchrony group 20(1), when the master device 21(2) of

US 9,195,258 B2

15

synchrony group 20(2) exchanges channel device control information with the audio information channel device 23(2), it is effectively exchanging channel device control information with the zone player 11(K+L+3). Similarly, when the master and slave devices 21(2), 22(1)(2), . . . , 22(L)(2) of synchrony group 20(2) receive audio and playback timing information, as well as clock timing information, from the audio information channel device 23(2), they are effectively receiving the information from the zone player 11(K+L+3). FIG. 2A depicts a multi-headed arrow representing audio and playback timing information transmitted by the zone player 11(K+3) as audio information channel device 23(2) to the master and slave devices 21(2), 22(1)(2), . . . , 22(L)(2) comprising synchrony group 20(2).

In the illustrative arrangement depicted in FIG. 2A, zone player 11(K+L+3), which is the audio information channel device 23(2) for synchrony group 20(2), is not shown as being either a master or a slave device in another synchrony group. However, it will be appreciated that zone player 11(K+L+3) could also be utilized as the master device or a slave device for another synchrony group. Indeed, it will be appreciated that the zone player that is utilized as the audio information channel device for synchrony group 20(2) may also be a zone player that is utilized as the master device 21(1) or a slave device 22(1)(1), . . . , 22(K)(1) in the synchrony group 20(1).

A zone player 11(n) that is utilized as a member of one synchrony group may also be utilized as the audio information channel device for another synchrony group if the audio information source that is to supply the audio information that is to be played by the other synchrony group is connected to that zone player 11(n). A zone player 11(n) may also be utilized as the audio information channel device for the other synchrony group if, for example, the audio information source is an audio information source 16(m) (FIG. 1) that is connected to the network 12 or an audio information source that is available over a wide area network such as the Internet. The latter may occur if, for example, the zone player 11(n) has sufficient processing power to operate as the audio information channel device and it is in an optimal location in the network 12, relative to the zone players comprising the other synchrony group (that is the synchrony group for which it is operating as audio information channel device) for providing the audio and playback timing information to the members of the other synchrony group. Other circumstances under which the zone player 11(n) that is utilized as a member of one synchrony group may also be utilized as the audio information channel device for another synchrony group will be apparent to those skilled in the art.

As was noted above, the master device 21 for a synchrony group 20 may be migrated from one zone player 11(n) to another zone player 11(n'). As was further noted above, the audio information channel device 23 for a synchrony group 20 may be migrated from one zone player 11(n) to another zone player 11(n'). It will be appreciated that the latter may occur if, for example, the audio information source that provides the audio program for the synchrony group is not connected to the zone player 11(n) that is operating as the audio information channel device 23, but instead is one of the audio information sources 16(m) connected to the network 12 or a source available over a wide area network such as the Internet. Operations performed during a migration of an audio information channel device 23 from one zone player 11(n) to another zone player 11(n') will generally depend on the nature of the audio information that is being channeled by the audio information channel device 23. For example, if the audio information source provides streaming audio, the zone player 11(n) that is currently operating as the audio information

16

channel device 23 for the synchrony group 20, can provide the following information to the other zone player 11(n') that is to become the audio information channel device 23 for the synchrony group 20:

(a) the identification of the source of the streaming audio information,

(b) the time stamp associated with the frame that the zone player 11(n) is currently forming, and

(c) the identifications of the zone players that are operating as the master device 21 and slave devices 22(g) comprising the synchrony group 20.

After the zone player 11(n') receives the information from the zone player 11(n), it will begin receiving the streaming audio from the streaming audio information source identified by the zone player 11(n), assemble the streaming audio information into frames, associate each frame with a time stamp, and transmit the resulting audio and playback timing information over the network 12. The zone player 11(n') will perform these operations in the same manner as described above, except that, instead of using the time indicated by its digital to analog converter clock 34 directly in generating the time stamps for the frames, the initial time stamp will be related to the value of the time stamp that is provided by the zone player 11(n) (reference item (b) above), with the rate at which the time stamps are incremented corresponding to the rate at which its (that is, the zone player 11(n'))'s clock increments. In addition, the zone player 11(n') will notify the zone players that are operating as the master device 21 and slave devices 22(g) of the synchrony group 20 that it is the new audio information channel device 23 for the synchrony group 20, and provide the multi-cast address that it will be using to multi-cast the audio and playback timing information, as well as its unicast network address. After the members of the synchrony group 20 receive the notification from the zone player 11(n') indicating that it is the new audio information channel device 23 for the synchrony group 20, they will receive the audio and playback timing information from the zone player 11(n') instead of the zone player 11(n), using the multi-cast address provided by the zone player 11(n'). In addition, they can utilize the zone player 11(n')'s unicast network address to obtain current time information therefrom. It will be appreciated that the zone player 11(n') will determine its current time in relation to the time stamp that is provided by the zone player 11(n) (reference item (b) above) or the current time information that it received from the zone player 11(n) using the SNTP protocol as described above.

Generally similar operations can be performed in connection with migrating the audio information channel device from one zone player 11(n) to another zone player 11(n') if the audio information is from one or more audio information files, such as may be the case if the audio information comprises MP3 or WAV files that are available from sources such as sources 16(m) connected to the network 12 or over from sources available over a wide area network such as the Internet, except for differences to accommodate the fact that the audio information is in files. In that case, the zone player 11(n) that is currently operating as the audio information channel device 23 for the synchrony group 20 can provide the following information to the zone player 11(n') that is to become the audio information channel device 23 for the synchrony group 20:

(d) a list of the audio information files containing the audio information that is to be played;

(e) the identification of the file for which the zone player 11(n) is currently providing audio and playback timing information, along with the offset into the file for which the current

17

item of audio and playback timing information is being generated and the time stamp that the zone player 11(*n*) is associating with that frame, and

(f) the identifications of the zone players that comprise the master device 21 and slave devices 22(*g*) comprising the synchrony group 20.

After the zone player 11(*n'*) receives the information from the zone player 11(*n*), it will begin retrieving audio information from the file identified in item (e), starting at the identified offset. In addition, the zone player 11(*n'*) can assemble the retrieved audio information into frames, associate each frame with a time stamp and transmit the resulting audio and playback timing information over the network 12. The zone player 11(*n'*) will perform these operations in the same manner as described above, except that, instead of using the time indicated by its digital to analog converter clock 34 directly in generating the time stamps for the frames, the value of the initial time stamp will be related to the time stamp that is provided by the zone player 11(*n*) (reference item (e) above), with the rate at which the time stamps are incremented corresponding to the rate at which its (that is, the zone player 11(*n'*)) clock increments. In addition, the zone player 11(*n'*) will notify the zone players that are operating as the master device 21 and slave devices 22(*g*) of the synchrony group 20 that it is the new audio information channel device 23 for the synchrony group 20, and provide the multi-cast address that it will be using to multi-cast the audio and playback timing information, as well as its unicast network address. After the members of the synchrony group 20 receive the notification from the zone player 11(*n'*) indicating that it is the new audio information channel device 23 for the synchrony group 20, they will receive the audio and playback timing information from the zone player 11(*n'*) instead of the zone player 11(*n*), using the multi-cast address provided by the zone player 11(*n'*). In addition, they can utilize the zone player 11(*n'*)'s unicast network address to obtain current time information therefrom. It will be appreciated that the zone player 11(*n'*) will determine its current time in relation to the time stamp that is provided by the zone player 11(*n*) (reference item (b) above) or the current time information that it received from the zone player 11(*n*) using the SNTP protocol as described above. The zone player 11(*n'*) will process successive audio information files in the list that it receives from the zone player 11(*n*) (reference item (d)).

Operations performed by the zone players 11(*n*) and 11(*n'*) in connection with migration of the audio information channel device 23 for other types of audio information will be apparent to those skilled in the art. In any case, preferably, the zone player 11(*n*) will continue operating as an audio information channel device 23 for the synchrony group 20 for at least a brief time after it notifies the zone player 11(*n'*) that it is to become audio information channel device for the synchrony group, so that the zone player 11(*n'*) will have time to notify the zone players in the synchrony group 20 that it is the new audio information channel device 23 for the synchrony group.

Before proceeding further in describing operations performed by the network audio system 10, it would be helpful to provide a detailed description of a zone player 11(*n*) constructed in accordance with the invention. FIG. 3 depicts a functional block diagram of a zone player 11(*n*) constructed in accordance with the invention. All of the zone players in the network audio system 10 may have similar construction. With reference to FIG. 3, the zone player 11(*n*) includes an audio information source interface 30, an audio information buffer 31, a playback scheduler 32, a digital to analog converter 33, an audio amplifier 35, an audio reproduction device interface

18

36, a network communications manager 40, and a network interface 41, all of which operate under the control of a control module 42. The zone player 11(*n*) also has a device clock 43 that provides timing signals that control the general operations of the zone player 11(*n*). In addition, the zone player 11(*n*) includes a user interface module interface 44 that can receive control signals from the user interface module 13 (FIGS. 1 and 2) for controlling operations of the zone player 11(*n*), and provide status information to the user interface module 13.

Generally, the audio information buffer 31 buffers audio information, in digital form, along with playback timing information. If the zone player 11(*n*) is operating as the audio information channel device 23 (FIG. 2) for a synchrony group 20, the information that is buffered in the audio information buffer 31 will include the audio and playback timing information that will be provided to the devices 21 and 22(*g*) in the synchrony group 20. If the zone player 11(*n*) is operating as the master device 21 or a slave device 22(*g*) for a synchrony group, the information that is buffered in the audio information buffer 31 will include the audio and playback timing information that the zone player 11(*n*) is to play.

The audio information buffer 31 can receive audio and playback timing information from two sources, namely, the audio information source interface 30 and the network communications manager 40. In particular, if the zone player 11(*n*) is operating as the audio information channel device 23 for a synchrony group 20, and if the audio information source is a source 14(*n*)(*s*) connected to the zone player 11(*n*), the audio information buffer 31 will receive and buffer audio and playback timing information from the audio information source interface 30. On the other hand, if the zone player 11(*n*) is operating as the audio information channel device 23 for a synchrony group 20, and if the audio information source is a source 16(*m*) connected to the network 12, or a source available over the wide area network, the audio information buffer 31 will receive and buffer audio and playback timing information from the network communications manager 40. It will be appreciated that, if the zone player 11(*n*) is not a member of the synchrony group, the zone player 11(*n*) will not play this buffered audio and playback timing information.

On yet another hand, if the zone player 11(*n*) is operating as the master device 21 or a slave device 22(*g*) in a synchrony group, and if the zone player 11(*n*) is not also the audio information channel device 23 providing audio and playback timing information for the synchrony group 20, the audio information buffer 31 will receive and buffer audio and playback timing information from the network communications manager 40.

The audio information source interface 30 connects to the audio information source(s) 14(*n*)(*s*) associated with the zone player 11(*n*). While the zone player 11(*n*) is operating as audio information channel device 23 for a synchrony group 20, and if the audio information is to be provided by a source 14(*n*)(*s*) connected to the zone player 11(*n*), the audio information source interface 30 will selectively receive audio information from one of the audio information source(s) 14(*n*)(*s*) to which the zone player is connected and store the audio information in the audio information buffer 31. If the audio information from the selected audio information source 14(*n*)(*s*) is in analog form, the audio information source interface 30 will convert it to digital form. The selection of the audio information source 14(*n*)(*s*) from which the audio information source interface 30 receives audio information is under control of the control module 42, which, in turn, receives control information from the user interface module through the user interface module interface 44. The audio

US 9,195,258 B2

19

information source interface **30** adds playback timing information to the digital audio information and buffers the combined audio and playback timing information in the audio information buffer **21**.

More specifically, as noted above, the audio information source interface **30** receives audio information from an audio information source **14(n)(s)**, converts it to digital form if necessary, and buffers it along with playback timing information in the audio information buffer **21**. In addition, the audio information source interface **30** will also provide formatting and scheduling information for the digital audio information, whether as received from the selected audio information source **14(n)(s)** or as converted from an analog audio information source. As will be made clear below, the formatting and scheduling information will control not only playback by the zone player **11(n)** itself, but will also enable other zone players **11(n')**, **11(n'')**, . . . that may be in a synchrony group for which the zone player **11(n)** is the master device, to play the audio program associated with the audio information in synchrony with the zone player **11(n)**.

In one particular embodiment, the audio information source interface **30** divides the audio information associated with an audio work into a series of frames, with each frame comprising digital audio information for a predetermined period of time. As used herein, an audio track may comprise any unit of audio information that is to be played without interruption. On the other hand, an audio program may comprise a series of one or more audio tracks that are to be played in succession. It will be appreciated that the tracks comprising the audio program may also be played without interruption, or alternatively playback between tracks may be interrupted by a selected time interval. FIG. 4 schematically depicts an illustrative framing strategy used in connection with one embodiment of the invention for a digital audio stream comprising an audio work. More specifically, FIG. 4 depicts a framed digital audio stream **50** comprising a sequence of frames **51(1)** through **51(F)** (generally identified by reference numeral **51(f)**). Each frame **51(f)**, in turn, comprises a series of audio samples **52(f)(1)** through **52(f)(S)** (generally identified by reference numeral **52(f)(s)**) of the audio track. Preferably all of the frames will have the same number "S" of audio samples, although it will be appreciated from the following that that is primarily for convenience. On the other hand, it will be appreciated that, the number of audio samples may differ from "S"; this may particularly be the case if the frame **51(f)** contains the last audio samples for the digital audio stream for a particular audio work. In that case, the last frame **51(F)** will preferably contain samples **52(F)(1)** through **52(F)(x)**, where "x" is less than "S." Generally, it is desirable that the number of samples be consistent among all frames **51(f)**, and in that case padding, which will not be played, can be added to the last frame **51(F)**.

Associated with each frame **51(f)** is a header **55(f)** that includes a number of fields for storing other information that is useful in controlling playback of the audio samples in the respective frame **51(f)**. In particular, the header **55(f)** associated with a frame **51(f)** includes a frame sequence number field **56**, an encoding type field **57**, a sampling rate information field **58**, a time stamp field **60**, an end of track flag **61**, and a length flag field **62**. The header **55(f)** may also include fields (not shown) for storing other information that is useful in controlling playback. Generally, the frame sequence number field **56** receives a sequence number "f" that identifies the relative position of the frame **51(f)** in the sequence of frames **51(1)** . . . **51(f)** . . . **51(F)** containing the digital audio stream **50**. The encoding type field **57** receives a value that identifies the type of encoding and/or compression that has been used in

20

generating the digital audio stream. Conventional encoding or compression schemes include, for example, the well-known MP3 and WAV encoding and/or compression schemes, although it will be appreciated that other schemes may be provided for as well. The sampling rate information field **58** receives sampling rate information that indicates the sampling rate for the audio samples **52(f)(s)**. As will be apparent to those skilled in the art, the sampling rate determines the rate at which the zone player **11(n)** is to play the audio samples **52(f)(s)** in the frame, and, as will be described below, determines the period of the digital to analog converter clock **34**.

The condition of the end of work flag **61** indicates whether the frame **51(f)** contains the last digital audio samples for the audio track associated with the framed digital audio work **50**. If the frame **51(f)** does not contain the audio samples that are associated with the end of the digital audio stream **50** for a respective audio work, the end of work flag will be clear. On the other hand, if the frame **51(f)** does contain the audio samples that are associated with the end of the digital audio stream **50** for a respective audio work, the end of work flag **61** will be set. In addition, since the number of valid audio samples **52(F)(s)** in the frame **51(F)**, that is, the samples that are not padding, may be less than "S," the default number of audio samples in a frame **51(f)**, the length flag field **62** will contain a value that identifies the number of audio samples in **52(F)(s)** in the last frame **51(F)** of the audio work **50**. If, as noted above, the frames have a consistent number "S" of samples, the samples **52(F)(x+1)** through **52(F)(S)** will contain padding, which will not be played.

The time stamp field **60** stores a time stamp that identifies the time at which the zone player **11(n)** is to play the respective frame. More specifically, for each frame of a framed digital audio stream **50** that is buffered in the audio information buffer **21**, the audio information source interface **30**, using timing information from the digital to analog converter clock **34**, will determine a time at which the zone player **11(n)** is to play the respective frame, and stores a time stamp identifying the playback time in the time stamp field **60**. The time stamp associated with each frame will later be used by the playback scheduler **32** to determine when the portion of the digital audio stream stored in the frame is to be coupled to the digital to analog converter **33** to initiate play back. It will be appreciated that the time stamps that are associated with frames in sequential frames **51(1)**, **51(2)**, . . . , **51(F)**, will be such that they will be played back in order, and without an interruption between the sequential frames comprising the digital audio stream **50**. It will further be appreciated that, after a time stamp has been determined for the first frame, stored in frame **51(1)**, of a digital audio stream **50**, the audio information source interface **30** can determine time stamps for the subsequent frame **51(2)**, **51(3)**, . . . , **51(F)** in relation to the number of samples "S" in the respective frames and the sample rate. The time stamps will also preferably be such that frames will be played back after some slight time delay after they have been buffered in the audio information buffer **21**; the purpose for the time delay will be made clear below.

Returning to FIG. 3, in addition to dividing the digital audio information into frames, the audio information source interface **30** also aggregates and/or divides the frames **51(f)** as necessary into packets, each of which will be of a length that would fit into a message for transmission over the network, and associates each packet with a packet sequence number. For example, if a packet will accommodate multiple frames **51(f)**, **51(f+1)**, . . . **51(f+y-1)**, it will aggregate them into a packet and associate them with a packet number, for example p(x). If the entire frames **51(f)** and **51(f+y-1)** was accommo-

US 9,195,258 B2

21

dated in packet $p(x)$, where “ x ” is the sequence number, which will occur if the size of a packet is an exact multiple of the frame size, the next packet, $p(x+1)$ will begin with frame $51(f+y)$ and will include frames $51(f+y)$, . . . , $51(f+2y-1)$. Subsequent packets $p(x+2)$, . . . will be formed in a similar manner. On the other hand, if the packet length will not accommodate an exact multiple of the frame size, the last frame in the packet will be continued at the beginning of the next packet.

If the audio information source interface **30** is aware of track boundaries, which may be the case if the tracks are divided into files, the packets will reflect the track boundaries, that is, the packets will not contain frames from two tracks. Thus, if the last frames associated with a track are insufficient to fill a packet, the packet will contain padding from the last frame associated with the track to the end of the packet, and the next packet will begin with the first frames associated with the next track.

In one embodiment, the audio information source interface **30** stores the packets in the audio information buffer **31** in a ring buffer. As is conventional, a ring buffer includes a series of storage locations in the buffer. Each entry will be sufficient to store one packet. Four pointers are used in connection with the ring buffer, a first pointer pointing to the beginning of the ring buffer, a second pointer pointing to the end of the ring buffer, a third “write” pointer pointing to the entry into which a packet will be written and a fourth “read” pointer pointing to the entry from which packet will be read for use in playback. When a packet is read from the ring buffer for playback, it will be read from the entry pointed to by the read pointer. After the packet has been read, the read pointer will be advanced. If the read pointer points beyond the end of the ring buffer, as indicated by the end pointer, it will be reset to point to the entry pointed to by the beginning pointer, and the operations can be repeated.

On the other hand, when the audio information source interface **30** stores a packet in the ring buffer, first determine whether the entry pointed to by the write pointer points to the same entry as the entry pointed to by the read pointer. If the write pointer points to the same entry as the entry pointed to by the read pointer, the entry contains at least a portion of a packet that has not yet been read for playback, and the audio information source interface **30** will delay storage of the packet until the entire packet has been read and the read pointer advanced. After the read pointer has been advanced, the audio information source interface **30** can store the packet in the entry pointed to by the write pointer. After the packet has been stored, the audio information source interface **30** will advance the write pointer. If the write pointer points beyond the end of the ring buffer, as indicated by the end pointer, it will be reset to point to the entry pointed to by the beginning pointer, and the operations can be repeated.

As noted above, the zone player **11(n)** can operate both as an audio information channel device **23** and a member of the synchrony group **20** of which it is a member. In that case, the audio information buffer **31** can contain one ring buffer. On the other hand, the zone player **11(n)** can operate as an audio information channel device **23** for one synchrony group **20(1)** (FIG. 2A) and a member of another synchrony group **20(2)**. In that case, the audio information buffer **31** would maintain two ring buffers, one for the audio and timing information associated with synchrony group **20(1)**, and the other for the audio and timing information associated with synchrony group **20(2)**. It will be appreciated that, in the latter case, the zone player **11(n)** will only use the audio and timing information that is associated with synchrony group **20(2)** for playback.

22

The playback scheduler **32** schedules playback of the audio information that is buffered in the audio information buffer **31** that is to be played by the zone player **11(n)**. Accordingly, under control of the playback scheduler **32**, the digital audio information that is buffered in the audio information buffer **21** that is to be played by the zone player **11(n)** is transferred to the digital to analog converter **33** for playback. As noted above, if the zone player **11(n)** is operating as an audio information channel device **23** for a synchrony group **20** for which it is not a member, the playback scheduler **32** will not schedule the digital audio information that is to be played by that synchrony group **20** for playback. The playback scheduler **32** only schedules the digital audio information, if any, that is buffered in the audio information buffer **31** that is associated with a synchrony group for which the zone player **11(n)** is a member, whether as master device **21** or a slave device **22(g)**.

Essentially, the playback scheduler **32** makes use of the read pointer associated with the circular buffer that contains the audio and playback timing information that is to be played by the zone player **11(n)**. The playback scheduler **32** retrieves the packet information from the entry of the ring buffer pointed to by the read pointer, and then advances the ring pointer as described above. The playback scheduler **32** determines the boundaries of the frames in the packet and uses the time stamps in the time stamp fields **60** associated with the respective frame $51(f)$, along with timing information provided by the zone player **11(n)**’s digital to analog converter clock **34**, to determine when the respective frame is to be transferred to the digital to analog converter **33**. Generally, when the time stamp associated with a buffered digital audio information frame corresponds to the current time as indicated by the digital to analog converter clock **34**, the playback scheduler **32** will enable the respective frame to be transferred to the digital to analog converter **33**.

The digital to analog converter **33**, also under control of the digital to analog converter clock **34**, converts the buffered digital audio information to analog form, and provides the analog audio information to the audio amplifier **35** for amplification. The amplified analog information, in turn, is provided to the audio reproduction devices $15(n)(r)$ through the audio reproduction device interface **36**. The audio reproduction devices $15(n)(r)$ transform the analog audio information signal to sound thereby to provide the audio program to a listener. The amount by which the audio amplifier **35** amplifies the analog signal is controlled by the control module **42**, in response to volume control information provided by the user through the user interface module **13**.

The network communications manager **40** controls network communications over the network **12**, and the network interface **41** transmits and receives message packets over the network **12**. The network communications manager **40** generates and receives messages to facilitate the transfer of the various types of information described above in connection with FIG. 2, including the channel device control information, slave device control information, audio and playback timing information and the audio information channel device’s clock timing information. In connection with the channel device control information and the slave device control information, the network communications manager **40** will generate messages for transfer over the network **12** in response to control information from the control module **42**. Similarly, when the network communications manager **40** receives messages containing channel device control information and slave device control information, the network communications manager will provide the information to the control module **42** for processing.

US 9,195,258 B2

23

With regards to the audio information channel device's clock timing information, as noted above, the master device **21** and slave devices **22(g)** of the synchrony group **20** obtain the clock timing information from the audio information channel device **23** using the well-known SNTP. If the zone player **11(n)** is operating as the audio information channel device **23** for a synchrony group, during the SNTP operation, it will provide its current time, particularly a current time as indicated by its digital to analog converter clock **34**. On the other hand, if the zone player **11(n)** is operating as the master device **21** or slave device **22(g)** of a synchrony group **20**, it will receive the clock timing information from the audio information channel device **23**. After the respective device **21**, **22(g)** has obtained the audio information channel device's clock timing information, it will generate a differential time value ΔT representing the difference between the time T indicated by its digital to analog converter clock **34** and the current time information from the audio information channel device **23**. The differential time value will be used to update the time stamps for the frames of the digital audio stream **50** (FIG. 4) that are received from the audio information channel device.

With regards to the audio and playback timing information, operations performed by the network communications manager **40** will depend on whether

(i) the audio and playback timing information has been buffered in the audio information buffer **31** for transmission, as audio information channel device **23**, over the network **12** to the master device **21** and/or slave devices **22(g)** of a synchrony group, or

(ii) the audio and playback timing information has been received from the network **12** to be played by the zone player **11(n)** as either the master device **21** for a synchrony group or a slave device in a synchrony group.

It will be appreciated that the network communications manager **40** may be engaged in both (i) and (ii) contemporaneously, since the zone player **11(n)** may operate both as the audio information channel device **23(1)** for a synchrony group **20(1)** (reference FIG. 2A) of which it is not a member, and a member of another synchrony group **20(2)** for which another zone player **11(n')** is the audio information channel device **23(2)**. With reference to item (i) above, after a packet that is to be transmitted has been buffered in the respective ring buffer, the network communications manager **40** retrieves the packet, packages it into a message and enables the network interface **41** to transmit the message over the network **12**. If the control module **42** receives control information from the user interface module **13** (if the master device **21** is also the audio information channel device **23** for the synchrony group **20**) or from the master device (if the master device **21** is not the audio information channel device **23** for the synchrony group **20**) that would require the transmission of a "resynchronize" command as described above, the control module **42** of the audio information channel device **23** enables the network communications manager **40** to insert the command into a message containing the audio and playback timing information. Details of the operations performed in connection with the "resynchronize" command will be described below. As noted above, the "resynchronize" command is used if the user enables a synchrony group to terminate the playback of a track that is currently being played, or cancel playback of a track whose playback has not begun.

On the other hand, with reference to item (ii) above, if network interface **41** receives a message containing a packet containing frames of audio and playback timing information that the zone player **11(n)** is to play either as a master device

24

21 or a slave device for a synchrony group **20**, the network interface **41** provides the audio and playback timing information to the network communications manager **40**. The network communications manager **40** will determine whether the packet contains a resynchronize command and, if so, notify the control module **42**, which will enable operations to be performed as described below. In any case, the network communications manager **40** will normally buffer the various frames comprising the audio and playback timing information in the audio information buffer **31**, and in that operation will generally operate as described above in connection with the audio information source interface **30**. Before buffering them, however, the network communications manager **40** will update their time stamps using the time differential value described above. It will be appreciated that the network communications manager **40** will perform similar operations whether the messages that contain the packets were multicast messages or unicast messages as described above.

The updating of the time stamps by the master device **21** and the slave devices **22(g)** in the synchrony group **20** will ensure that they all play the audio information synchronously. In particular, after the network communications manager **40** has received a frame **51(f)** from the network interface **41**, it will also obtain, from the digital to analog converter clock **34**, the zone player **11(n)**'s current time as indicated by its digital to analog converter clock **34**. The network communications manager **40** will determine a time differential value that is the difference between the slave device's current clock time, as indicated by its digital to analog converter **34**, and the audio information channel device's time as indicated by the audio information channel device's clock timing information. Accordingly, if the master or slave device's current time has a value T_s and the audio information channel device's current time, as indicated by the clock timing information, has a value T_c , the time differential value $\Delta T = T_s - T_c$. If the current time of the master or slave device in the synchrony group **20**, as indicated by its digital to analog converter clock **34**, is ahead of the audio information channel device's clock time as indicated by the clock timing information received during the SNTP operation, the time differential value will have a positive value. On the other hand, if the master or slave device's current time is behind the audio information channel device's clock time, the time differential value ΔT will have a negative value. If the zone player **11(n)** obtains clock timing information from the audio information channel device **23** periodically while it is a member of the synchrony group **20**, the network communications manager **40** can generate an updated value for the time differential value ΔT when it receives the clock timing information from the audio information channel device **23**, and will subsequently use the updated time differential value.

The network communications manager **40** uses the time differential value ΔT that it generates from the audio information channel device timing information and zone player **11(n)**'s current time to update the time stamps that will be associated with the digital audio information frames that the zone player **11(n)** receives from the audio information channel device. For each digital audio information frame that is received from the audio information channel device, instead of storing the time stamp that is associated with the frame as received in the message in the audio information buffer **21**, the network communications manager **40** will store the updated time stamp with the digital audio information frame. The updated time stamp is generated in a manner so that, when the zone player **11(n)**, as a member of the synchrony group plays back the digital audio information frame, it will do so in synchrony with other devices in the synchrony group.

US 9,195,258 B2

25

More specifically, after the zone player 11(n)'s network interface 41 receives a message containing a packet that, in turn, contains one or more frames 51(f), it will provide the packet to the network communications manager 40. For each frame 51(f) in the packet that the network communications manager 40 receives from the network interface 41, the network communications manager 40 will add the time differential value ΔT to the frame's time stamp, to generate the updated time stamp for the frame 51(f), and store the frame 51(f), along with the header 55(f) with the updated time stamp in the audio information buffer 31. Thus, for example, if a frame's time stamp has a time value T_F , the network communications manager 40 will generate an updated time stamp $T_F^{U_F}$ having a time value $T_F^{U_F} = T_F + \Delta T$. Since time value $T_F^{U_F}$ according to the slave device's digital to analog converter clock 34 is simultaneous to the time value T_F according to the audio information channel device's digital to analog converter clock 34, the zone player 11(n) device will play the digital audio information frame at the time determined by the audio information channel device 23. Since all of the members of the synchrony group 20 will perform the same operations, generating the updated time stamps $T_F^{U_F}$ for the various frames 51(f) in relation to their respective differential time values, all of the zone players 11(n) in the synchrony group 20 will play them synchronously. The network communications manager 40 will generate updated time stamps $T_F^{U_F}$ for all of the time stamps 60 in the packet, and then store the packet in the audio information buffer 31.

It will be appreciated that, before storing a packet in the audio information buffer 21, the network communications manager 40 can compare the updated time stamps $T_F^{U_F}$ associated with the frames in the packet to the slave device's current time as indicated by its digital to analog converter clock 34. If the network communications manager 40 determines the time indicated by the updated time stamps of frames 51(f) in the packet are earlier than the zone player's current time, it can discard the packet instead of storing it in the audio information buffer 21, since the zone player 11(n) will not play them. That is, if the updated time stamp has a time value $T_F^{U_F}$ that identifies a time that is earlier than the zone player's current time T_S as indicated by the zone player's digital to analog converter clock 34, the network communications manager 40 can discard the packet.

If the zone player 11(n) is operating as the master device 21 of a synchrony group 20, when the user, through the user interface module 13, notifies the zone player 11(n) that another zone player 11(n') is to join the synchrony group 20 as a slave device 22(g), the control module 42 of the zone player 11(n) enables the network communications manager 40 to engage in an exchange of messages, described above in connection with FIG. 2, to enable the other zone player 11(n') to join the synchrony group 20 as a slave device. As noted above, during the message exchange, the messages generated by the network communications manager 40 of the zone player 11(n) will provide the network communications manager of the zone player 11(n') that is to join the synchrony group 20 with information such as the multi-cast address being used by the audio information channel device 23 that is providing the audio program to the synchrony group 20, as well as a unicast network address for the audio information channel device 23. After receiving that information, the network communications manager and network interface of the zone player 11(n') that is to join the synchrony group 20 can begin receiving the multi-cast messages containing the audio program for the synchrony group, engage in SNTP transactions with the audio information channel device 23 to obtain the latter's current time, and also enable the audio information channel device 23

26

to send the zone player 11(n') frames 51(f) that it had previously broadcast using the unicast message transmission methodology as described above.

On the other hand, if the network communications manager 40 and network interface 41 of the zone player 11(n) receive a message over the network 12 indicating that it is to become a slave device 22(g) of a synchrony group for which another zone player 11(n') is the master device, the network communications manager 40 for zone player 11(n) will provide a notification to the control module 42 of zone player 11(n). Thereafter, the control module 42 of zone player 11(n) can enable the network communications manager 40 of zone player 11(n) to perform the operations described above to enable it to join the synchrony group 20.

As noted above, the user, using user interface module 13, can enable the synchrony group to terminate playback of a track of an audio program that is currently being played. After playback of a track that is currently being played has been terminated, playback will continue in a conventional manner with the next track that has been buffered in the audio information buffer 31. It will be appreciated that that could be the next track that is on the original play list, or a previous track. In addition, the user can enable the synchrony group 20 to cancel playback of a track that it has not yet begun to play, but for which buffering of packets has begun in the synchrony group 20. Both of these operations make use of the "resynchronize" command that the master device 21 of the synchrony group 20 can enable the audio information channel device 23 to include in the multi-cast message stream that it transmits to the synchrony group 20. Generally, in response to receipt of the resynchronize command, the members of the synchrony group 20 flush the ring buffer containing the packets that they are to play in the future. In addition, if the members of the synchrony group provide separate buffers for their respective digital to analog converters 33, the members will also flush those buffers as well. After the audio information channel device transmits a packet containing the resynchronize command:

(i) in the case of the use of the resynchronize command to terminate playing of a track that is currently being played, the audio information channel device 23 will begin multi-casting packets for the next track, to begin play immediately, and will continue through the play list in the manner described above; and

(ii) in the case of the use of the resynchronize command to cancel play of a track for which buffering has begun, but which is to be played in the future, the audio information channel device 23 will begin multi-casting packets for the track after the track that has been cancelled, to be played beginning at the time the cancelled track was to begin play, and will also continue through the play list in the manner described above.

It will be appreciated that,

(a) in the first case (item (i) directly above), the resynchronize command can enable the read pointer to be set to point to the entry in the circular buffer into which the first packet for the next track will be written, which will correspond to the entry to which the write pointer points, but

(b) in the second case (item (ii) directly above), the resynchronize command can enable the write pointer for the circular buffer to be set to point to the entry that contains the first packet for the track whose play is being cancelled.

It will further be appreciated that, if a track is cancelled for which buffering has not begun, the resynchronize command will generally not be necessary, since the audio information channel device 23 for the synchrony group 20 need only delete that track from the play list.

US 9,195,258 B2

27

Operations performed in connection with use of the resynchronize command to cancel playback of a track that is currently being played will be described in connection with Packet Sequence A below, and operations performed in connection with the use of the resynchronize command to cancel playback of a track that has not yet begun to play, but for which buffering of packets has begun, will be described in connection with Packet Sequence B below.

Packet Sequence A

(A1.0) [packet 57]
 (A1.1) [continuation of frame 99]
 (A1.2) [frame 100, time=0:00:01, type=mp3 audio]
 (A1.3) [frame 101, time=0:00:02, type=mp3 audio]
 (A1.4) [frame 102, time=0:00:03, type=mp3 audio]
 (A2.0) [packet 58]
 (A2.1) [continuation of frame 102]
 (A2.2) [frame 103, time=0:00:04, type=mp3 audio]
 (A2.3) [frame 104, time=0:00:05, type=mp3 audio]
 (A2.4) [frame 105, time=0:00:06, type=mp3 audio]
 (A3.0) [packet 59]
 (A3.1) [continuation of frame 105]
 (A3.2) [frame 106, time=0:00:07, type=mp3 audio]
 (A3.3) [frame 107, time=0:00:08, type=mp3 audio]
 (A3.4) [frame 108, time=0:00:09, type=mp3 audio]
 (A4.0) [packet 60]
 (A4.1) [continuation of frame 108]
 (A4.2) [frame 109, time=0:00:10, type=mp3 audio]
 (A4.3) [Resynchronize command]
 (A4.4) [Padding, if necessary]
 (A5.0) [packet 61]
 (A5.1) [frame 1, time=0:00:07, type=mp3 audio]
 (A5.2) [frame 2, time=0:00:08, type=mp3 audio]
 (A5.3) [frame 3, time=0:00:09, type=mp3 audio]
 (A5.4) [frame 4, time=0:00:10, type=mp3 audio]
 (A6.0) [packet 62]
 (A6.1) [continuation of frame 4]
 (A6.2) [frame 5, time=0:00:11, type=mp3 audio]
 (A6.3) [frame 6, time=0:00:12, type=mp3 audio]
 (A6.4) [frame 7, time=0:00:13, type=mp3 audio]

Packet Sequence A comprises a sequence of six packets, identified by packet 57 through packet 62, that the audio information channel device 23 multi-casts in respective messages to the members of a synchrony group 20. It will be appreciated that the series of messages that the audio information channel device 23 may multi-cast to the synchrony group 20 may include a messages prior to the packet 57, and may also include messages after packet 62. Each packet comprises a packet header, which is symbolized by lines (A1.0), (A2.0), . . . (A6.0) in Packet Sequence A, and will generally also include information associated with at least a portion of a frame. In the packets represented in Packet Sequence A, each packet includes information associated with a plurality of frames. Depending on the lengths of the packets, each packet may contain information associated with a portion of a frame, an entire frame, or multiple frames. In the illustration represented by Packet Sequence A, it is assumed that each packet may contain information associated with multiple frames. In addition, it is assumed that a packet does not necessarily contain information associated with an integral number of frames; in that case, a packet may contain information associated with a portion of a frame, and the next packet will contain the information associated with the rest of a frame.

The frames and associated header playback timing information contained in the various packets are symbolized by lines (A1.1), (A1.2), . . . , (A1.4), (A2.1), . . . (A6.4) of Packet Sequence A. Thus, for example, line (A1.2) of packet 57

28

represents the one-hundredth frame, that is, frame 51(100) (reference FIG. 4), of the track whose audio information is being transmitted in the sequence of packets that includes packet 57. The frame 51(100) is to be played at an illustrative time, according to the audio information channel device's digital to analog converter clock, of "time=0:00:01," and the frame is encoded and/or compressed using the well-known MP3 encoding and compression methodology. In that case, the legend "time=0:00:01" represents the time stamp that would be included in field 60 (FIG. 4) of the header associated with the frame 50(100) as multi-cast by the audio information channel device for the synchrony group. It will be appreciated that the playback time and encoding/compression methodology will be referred in the header 55(100) that is associated with the frame 51(100). It will also be appreciated that the header may also contain additional information as described above.

Similarly, line (A1.3) of packet 57 represents the one-hundred and first frame, that is, frame 51(101), of the track whose audio information is being transmitted in the sequence of packets that includes packet 57. The frame 51(101) is to be played at an illustrative time, according to the audio information channel device's digital to analog converter clock, of "0:00:02," and the frame is also encoded and/or compressed using the MP3 encoding and compression methodology. Line (A1.4) of packet 57 represents similar information, although it will be appreciated that, depending on the length of packet 57, the line may not represent the information for an entire frame 51(102) and/or its associated header. If the length of packet 57 is not sufficient to accommodate the information for the entire frame 51(102) and/or associated header, the information will continue in packet 58, as represented by line (A2.1) in Packet Sequence A. Similarly, if the length of packet 56 was not sufficient to contain the information for an entire frame 51(99) preceding frame 51(100), packet 57 (lines (A1.0) through 1.4) may contain any information from frame 51(99) that packet 56 was unable to accommodate.

As noted above, when the master device 21 or a slave device 22(g) in the synchrony group 20 receives the packet 57, its respective network communications manager 40 will update the time stamps associated with the various frames 51(j) as described above before buffering the respective frames in the respective audio information buffer 31.

Packets 58 and 59 contain information that is organized along the lines described above in connection with packet 57.

Packet 60 also contains, as represented by lines (A4.1) and (A4.2), information that is organized along the lines of the information represented by lines (Ax.1) and (Ax.2) ("x" equals an integer) described above in connection with packets 57 through 59. On the other hand, packet 60 contains a resynchronize command, as represented by line (A4.3). Packet 60 also may contain padding, as represented by line 4.4, following the resynchronize command. As noted above, the master device 21 of a synchrony group 20 will enable the audio information channel device 23 that is providing audio information to the synchrony group 20 to multi-cast a message containing the resynchronize command when it receives notification from the user interface module 13 that the user wishes to cancel playback of a track that is currently being played. In the example depicted in Packet Sequence A, as will be described below, the audio information channel device 23 receives notification from the master device 21 that the user wishes to cancel playback of a track at a time corresponding to "time=0:00:07" according to its digital to analog converter clock 34, and, in line (A4.3) of packet 60 it will provide the resynchronize command, followed by padding, if necessary.

US 9,195,258 B2

29

As will be apparent from examining lines (A3.1) through (A3.4) of packet **59** and lines (A4.1) and (A4.2) of packet **60**, although the audio information channel device **23** has received the notification from the synchrony group's master device **21** to multi-cast the resynchronize command at a time corresponding to "time=0:00:07" according to the clock time indicated by its digital to analog converter clock **34**, it (that is, the audio information channel device **23**) has already multi-cast messages containing frames that are to be played at that time and subsequently. That is, the audio information channel device **23** has, multi-cast in packet **59**, frames **51(106)** through **51(108)** that contain time stamps "time=0:00:07," "time=0:00:08" and "time=0:00:09," respectively, and, in packet **60**, in addition to the continuation of frame **51(108)**, frame **51(109)** that contains time stamp "time=0:00:10." (It will be appreciated that the times indicated by the illustrative time stamps are for illustration purposes only, and that in an actual embodiment the time stamps may have different values and differentials.)

As noted above, the audio information channel device **23** multi-casts a message containing a packet that, in turn, contains the resynchronize command when it receives the notification from the master device **21** to do so. In the example depicted in Packet Sequence A, the packet will be multi-cast when the audio information channel device's digital to analog converter clock time corresponds to "0:00:07." Subsequently, two things happen. In one, aspect, when the master device **21** and slave devices **22(g)** receive the packet that contains the resynchronize command, they will stop playing the audio program that they are playing.

In addition, the audio information channel device **23** will begin transmitting frames containing audio information for the next track, including therewith time stamps immediately following the digital to analog converter clock time at which the packet including the resynchronize command was transmitted. Accordingly, and with further reference to Packet Sequence A, the audio information channel device **23** will multi-cast a message containing packet **61**. As indicated above, packet **61** contains, as represented in lines (A5.1) through (A5.3), frames **51(1)** through **51(3)**, which are the first three frames of the next track of the audio program that is to be played. It is also compressed and encoded using the MP3 encoding and compression scheme, and it is accompanied by time stamps "time=0:00:07," "time=0:00:08" and "time=0:00:10." As noted above, the time stamp "time=0:00:07" corresponds to the clock time at which the audio information channel device **23** multi-casts the resynchronize command, and, when the master device **21** and slave devices **22(g)** receive these frames, they would be expected to begin playing them very shortly, if not immediately after the audio information channel device **23** multi-casts the message containing the packet that, in turn, contains the resynchronize command. Packet **61** also includes at least a portion of the next frame, that is, frame **51(4)**, for that track. In addition, Packet Sequence A depicted above further includes a subsequent packet, namely, packet **62**, that contains any necessary continuation of frame **51(4)**, as well as three subsequent frames. If any additional packets are required for the track, as well as for subsequent tracks, they can be multi-cast in a similar manner.

As further noted above, the resynchronize command can also be used to cancel playing of one or more tracks for which playback has begun. This will be illustrated in connection with Packet Sequence B:

Packet Sequence B

(B1.0) [packet **157**]

(B1.1) [continuation of frame **99**]

30

(B1.2) [frame **100**, time=0:00:01, type=mp3 audio]
 (B1.3) [frame **101**, time=0:00:02, type=mp3 audio]
 (B1.4) [frame **102**, time=0:00:03, type=mp3 audio]
 (B2.0) [packet **158**]

5 (B2.1) [continuation of frame **102**]
 (B2.2) [frame **103**, time=0:00:04, type=mp3 audio]
 (B2.3) [frame **104**, time=0:00:05, type=mp3 audio]
 (B2.4) [frame **105**, time=0:00:06, type=mp3 audio]
 (B3.0) [packet **159**]

10 (B3.1) [continuation of frame **105**]
 (B3.2) [frame **106**, time=0:00:07, type=mp3 audio]
 (B3.3) [track boundary notification]
 (B3.4) [Padding, if necessary]
 (B4.0) [packet **160**]

15 (B4.1) [frame **1**, time=0:00:08, type=mp3 audio]
 (B4.2) [frame **2**, time=0:00:09, type=mp3 audio]
 (B4.3) [frame **3**, time=0:00:10, type=mp3 audio]
 (B5.0) [packet **161**]

(B5.1) [continuation of frame **3**]
 20 (B5.2) [frame **4**, time=0:00:11, type=mp3 audio]
 (B5.3) [Resynchronize, after packet **159**]
 (B5.4) [Padding, if necessary]
 (B6.0) [packet **162**]

(B6.1) [frame **1**, time=0:00:08, type=mp3 audio]
 25 (B6.2) [frame **2**, time=0:00:09, type=mp3 audio]
 (B6.3) [frame **3**, time=0:00:10, type=mp3 audio]
 (B6.4) [frame **4**, time=0:00:11, type=mp3 audio]
 (B7.0) [packet **163**]

(B7.1) [continuation of frame **4**]
 30 (B7.2) [frame **5**, time=0:00:12, type=mp3 audio]
 (B7.3) [frame **6**, time=0:00:13, type=mp3 audio]
 (B7.4) [frame **7**, time=0:00:14, type=mp3 audio]

Packet Sequence B comprises a series of seven packets, identified by packet **157** through **163**, that the audio information channel device **23** multi-casts to the members of a synchrony group **20**. As with Packet Sequence A, it will be appreciated that the series of packets that the audio information channel device **23** may multi-cast to the synchrony group **20** may include packets prior to the packet **157**, and may also include packets after packet **162**. Each packet comprises a packet header, which is symbolized by lines (B1.0), (B2.0), . . . (B7.0) in Packet Sequence B. As in Packet Sequence A, each packet will also generally include information associated with at least a portion of a frame **51(f)** along with its associated frame **55(f)**. As in the packets represented in Packet Sequence A, each packet includes information associated with a plurality of frames. Depending on the lengths of the packets, each packet may contain information associated with a portion of a frame, an entire frame, or multiple frames. Further, as with Packet Sequence A, it is assumed that each packet may contain information associated with multiple frames. In addition, it is assumed that a packet does not necessarily contain information associated with an integral number of frames; in that case, a packet may contain information associated with a portion of a frame, and the next packet will contain the information associated with the rest of a frame.

The structures of the packets represented by Packet Sequence B are similar to those described above in connection with Packet Sequence A, and will not be repeated here. Generally, Packet Sequence B illustratively contains a sequence of packets that represent at least portions of three tracks that may have been selected from, for example, a play list. In particular, packets **157** through **159** represent frames from a portion of one track, packets **160** and **161** represent frames from a second track and packets **162** and **163** represent frames from a third track. The play list indicated that the first,

US 9,195,258 B2

31

second and third tracks were to be played in that order. With particular reference to Packet Sequence B, it should be noted that line (B3.3) indicates that packet 159 includes an indication that that packet contains the last frame for the track, and line (B3.4) provides for padding to the end of the packet. The first frame of the next track begins in packet 160.

In connection with the use of the resynchronize command to cancel playback of a track, at least a portion of which the audio information channel device 23 has multi-cast to the members of the synchrony group, packet 161, in line (B5.3) represents a resynchronize command that indicates that resynchronization is to occur after packet 159, that is, immediately after the packet that contains the last frame of the first of the three tracks represented by the packets in Packet Sequence B. It should be noted that the resynchronize command is in the packet 161, while the resynchronization is to occur at packet 160, that is, the synchrony group is to not play the track starting with packet 160, but instead is to begin playing the track frames for which begin with the next packet, that is, packet 162. As with Packet Sequence A, in Packet Sequence B the audio information channel device 23, in packet 162 and 163, multi-casts frames whose time stamps indicate that they are to be played when the frames that were multi-cast in packets 160 and 161 were to be played. By use of the resynchronize command and specifying a packet in this manner, the audio information channel device can cancel playback of a track for which playback has not yet begun.

It will be appreciated that the resynchronize command is generally not necessary for cancelling play back of a track that the audio information channel device 23 has not started multi-casting to the synchrony group 20, since the audio information channel device 23 itself can re-order the play list to accommodate the cancellation.

The invention provides a number of advantages. In particular, the invention provides a network audio system in which a number of devices share information can reproduce audio information synchronously, notwithstanding the fact that packets, which may contain digital audio information, transmitted over the network to the various zone players connected thereto may have differing delays and the zone players operate with independent clocks. Moreover, although the invention has been described in connection with audio information, it will be appreciated that the invention will find utility in connection with any type of isochronous information for which synchrony among devices is desired. The system is such that synchrony groups are created and destroyed dynamically, and in such a manner as to avoid requiring a dedicated device as the master device.

It will be appreciated that a number of changes and modifications may be made to the network audio system 10 as described above. For example, although the invention has been described as providing that the audio information channel device 23 provides digital audio information to the members synchrony group 20 that has been encoded using particular types of encoding and compression methodologies, it will be appreciated that the audio information channel device 23 can provide digital audio information to various members of the synchrony group 20 that have been encoded and compressed using different types of encoding and compression methodologies, and, moreover, for which different sampling rates have been used. For example, the audio information channel device 23 may provide digital audio information to the master device 21 and slave devices 22(1) through 22(g_1) using the MP3 methodology at a specified sampling rate, the digital audio information for the same program to slave devices 22(g_1+1) through 22(g_2) using the WAV methodology at one specified sampling rate, and to slave devices

32

22(g_2+1) through 22(G) using the WAV methodology at another specified sampling rate. In that case, the audio information channel device 23 can specify the particular encoding and compression methodology that has been used in the encoding type field 57 associated with each frame and the sampling rate in the sampling rate field 58. Moreover, since the encoding and compression type and sampling rate are specified for each frame, the encoding and compression type and sampling rate can be changed from frame to frame. The audio information channel device 23 may use different multi-cast addresses for the different encoding and compression types and sampling rates, but it will be appreciated that that would not be required.

It will be appreciated that two advantages of providing that the encoding and compression methodology and the sampling rate is provided on a frame-by-frame basis, instead of, for example, a track-by-track basis, is that that would facilitate a slave device joining the synchrony group 20 at a frame mid-track, without requiring, for example, the master device 21 or the audio information channel device 23 to notify it of the encoding and compression methodology or the sampling rate.

Another modification is that, instead of the network communications manager 40 of a member of a synchrony group 20 generating the updated time stamp T_F^U for a digital audio information frame by adding the time differential value ΔT to the time stamp T_F associated with a frame, the network communications manager 40 may instead generate the updated time stamp T_F^U by subtracting the differential time value ΔT from the member's current time T_S as indicated by the member's digital to analog converter clock 34 at the time at which the digital audio information is received. It will be appreciated, however, that there may be variable time delays in processing of messages by the slave device's network communications manager 40, and so it may be preferable to generate the time differential value ΔT using the time stamp T_F provided by the audio information channel device 23.

In addition, instead of the network communications manager 40 of a member of a synchrony group generating an updated time stamp to reflect the difference between the times indicated by the member's digital to analog converter clock and the audio information channel device's digital to analog converter clock, the network communications manager 40 can generate the time differential value ΔT and provide it to the member's playback scheduler 32. In that case, the member's network communications manager 40 can store each digital audio information frame along with the time stamp T_F as received from the master device in the audio information buffer 21. The playback scheduler 32 can utilize the time differential value ΔT , and the time stamps T_F associated with the digital audio information frames, to determine when the respective digital audio information frames are to be played. In determining when a digital audio information frame is to be played, the playback scheduler can add the time differential value to the time stamp T_F associated with the digital audio frame, and enable the digital audio frame to be coupled to the digital to analog converter 33 when the time indicated by the sum corresponds to the current time as indicated by the slave device's digital to analog converter clock 34. Alternatively, when the member's digital to analog converter clock 34 updates its current time T_S , the playback scheduler can generate an updated current time T_S' by subtracting the differential time value ΔT from the current time T_S , and using the updated current time T_S' to determine when to play a digital audio information frame.

As described above, the members of a synchrony group 20 periodically obtain the audio information channel device's

US 9,195,258 B2

33

current time value and uses the current time value that it receives from the audio information channel device to periodically update the time differential value ΔT that it uses in updating the time stamps associated with the various frames. It will be appreciated that, if the digital to analog converter clock(s) associated with the member(s) of a synchrony group 20 are ensured to have the same rate as the digital to analog converter clock, a member need only obtain the current time value from the audio information channel device once, at the beginning of playback.

As another alternative, if the zone players are provided with digital to analog converter clock 34 whose time and rate can be set by an element such as the network communications manager 40, when a zone player 11(n) is operating as a member of a synchrony group 20, its network communications manager 40 can use the various types of timing information that it receives from the audio information channel device 23, including the current time information and the playback timing information indicated by the time stamps that are associated with the various frames 51(f) comprising the audio and playback timing information that it receives, to adjust the synchrony group member's digital to analog converter clock's time value and/or the clock rate that it uses for playback. If the clock's time value is to be adjusted, when the synchrony group member's network communications manager 40 initially receives the current time information from the audio information channel device 23 for the synchrony group 20, the network communications manager 40 can set the synchrony group member's digital to analog converter clock 34 to the current time value as indicated by the audio information channel device's current time information. The network communications manager 40 can set the clock 34 to the current time value indicated by the audio information channel device's current time information once, or periodically as it receives the current time information.

Alternatively or in addition, the synchrony group member's network communications manager 40 can use one or both of the current time information and/or the playback timing information in the time stamps associated with the respective frames 51(f) to adjust the clock rate of the clock 34 that it uses for playback. For example, when the synchrony group member's network communications manager 40 receives a frame 51(f_x) having a time stamp having a time value T_{f_x} , it can generate the updated time value $T_{f_x}^U = T_{f_x} + \Delta T$ as described above, and store the frame with the time stamp with the updated time value in the audio information buffer 30. In addition, since both the number of samples in a frame and the sampling rate, which determines the rate at which the frame is to be played, are known to the network communications manager 40, it can use that information, along with the updated time value $T_{f_x}^U$ that is to be used for frame 51(f_x) to generate an expected updated time value $T_{f_{x+1}}^E$ that is expected for the updated time stamp of the next frame 51(f_{x+1}). After the synchrony group member's network communications manager 40 receives the next frame 51(f_{x+1}), it can generate the updated time value $T_{f_{x+1}}^U$ and compare that value to the expected updated time value $T_{f_{x+1}}^E$. If the two time values do not correspond, or if the difference between them is above a selected threshold level, the clock that is used by the audio information channel device 23 to generate the time stamps is advancing at a different rate than the synchrony group member's digital to analog converter clock 34, and so the network communications manager 40 can adjust the rate of the digital to analog converter clock 34 to approach that of the clock used by the audio information channel device 23 so that the differential time value ΔT is constant. On the other hand, if the two time values do correspond, then the time

34

differential value ΔT is constant, or the difference is below a threshold level, and the network communications manager 40 need not change the clock rate of the digital to analog converter clock 34. It will be appreciated that, if the clock rate is to be adjusted, the rate adjustment can be fixed, or it can vary based on, for example, the difference between the updated time value $T_{f_{x+1}}^U$ and the expected updated time value $T_{f_{x+1}}^E$.

It will also be appreciated that, if no rate adjustment is performed for one frame 51(f_{x+1}), the synchrony group member's network communications manager 40 can generate an expected updated time value $T_{f_{x+2}}^E$ that is expected for the updated time stamp of the next frame 51(f_{x+2}) using the updated time value $T_{f_x}^U$ determined for frame 51(f_x), along with the number of samples in a frame and the sampling rate, and compare the expected updated time value $T_{f_{x+2}}^E$ to the updated time value $T_{f_{x+2}}^U$ that it generates when it receives frame 51(f_{x+2}). At that point, if the network communications manager 41 determines that two time values do not correspond, or if the difference between them is above a selected threshold level, it can adjust the rate of the digital to analog converter clock 34. Similar operations can be performed if no rate adjustment is performed for several successive frames 51(f_{x+1}), 51(f_{x+2}), ... This will accommodate the possibility that the rate differential between the clock 34 and the clock used by the audio information channel device 23 in generating the time stamps have rates that differ by an amount sufficiently small that it cannot be detected using time stamps of two or more successive frames.

Instead or in addition to adjusting the clock rate as described above, the synchrony group member's network communications manager 40 can perform similar operations in connection with adjusting the clock rate in connection with the current time information that it receives from the audio information channel device 23.

Furthermore, although the network audio system 10 has been described such that the master device 21 of a synchrony group 20 can, in response to control information provided thereto by a user through the user interface module 13, provide a notification to a zone player 11(n) that it is to become a member of its synchrony group 20 as a slave device 22(g), it will be appreciated that the user interface module 13 can provide the notification directly to the zone player 11(n) that is to become a member of the synchrony group 20. In that case, the zone player 11(n) can notify the master device 21 that it is to become a slave device 22(g) in the synchrony group 20, after which the master device 21 can provide information regarding the synchrony group 20, including the multi-cast and unicast addresses of the audio information channel device and other information as described above.

Similarly, although the network audio system 10 has been described such that the master device 21 of a synchrony group 20 can, in response to control information provided thereto by a user through the user interface module 13, provide a command to a slave device 22(g) to enable the slave device 22(g) to adjust its volume, it will be appreciated that the user interface module 13 can provide control information directly to the slave device 22(g) to enable the slave device 22(g) to adjust its volume.

In addition, although the network audio system 10 has been described such that each frames 51(f) is associated with a frame sequence number (reference field 56, FIG. 4), it will be appreciated that, if the packets described above in connection with Packet Sequence A and Packet Sequence B are provided with packet sequence numbers, the frame sequence numbers need not be provided, since the packet sequence numbers can suffice for defining the frame sequencing.

US 9,195,258 B2

35

Furthermore, although the network audio system 10 has been described such that the zone players 11(*n*) are provided with an audio amplifier 35 for amplifying the analog signal provided by the respective digital to analog converters 33, it will be appreciated that a zone player may be provided that does not itself include an audio amplifier. In that case, the analog signal may be coupled to an external amplifier for amplification as necessary before being provided to the audio reproduction device(s) 15(*n*)(*r*). It will be appreciated that a single zone player 11(*n*) may be provided with multiple audio amplifiers and audio reproduction device interfaces, and, if necessary, multiple digital to analog converters 33, to provide audio programs for corresponding numbers of synchrony groups.

Similarly, although the zone players 11(*n*) have been described such that they may be connected to one or more audio information sources, it will be appreciated that an audio information source may form part of and be integrated into a zone player 11(*n*). For example, a zone player may include a compact disk player, cassette tape player, broadcast radio receiver, or the like, that has been integrated into it. In addition, as noted above, an individual zone player 11(*n*) may be connected to multiple audio information sources and may contemporaneously operate as the audio information channel device 23 for multiple synchrony groups.

In addition, although FIG. 1 shows the network audio system 10 as including one user interface module 13, it will be appreciated that the system 10 may include a plurality of user interface modules. Each user interface module be useful for controlling all of the zone players as described above, or alternatively one or more of the user interface modules may be useful for controlling selected subsets of the zone players.

Moreover, it will be appreciated that, although the invention has been described in connection with audio information, it will be appreciated that the invention will find utility in connection with any type of information for which synchrony among devices connected to a network is desired.

As noted above, while a zone player 11(*n*) is operating as audio information channel device 23 for a synchrony group 20, when the zone player 11(*n*)'s audio information source interface 30 or network communications manager 40 stores digital audio information frames based on audio information from an audio information source 14(*n*)(*s*) in the audio information buffer 31, it will provide time stamps for the respective frames to schedule them for playback after some time delay after they have been buffered in the audio information buffer 31. The delay is provided so that, for other zone players 11(*n'*), 11(*n''*), . . . that are operating as members of a synchrony group, there will be sufficient time for the audio and playback timing information to be transferred over the network 12 to those other zone players 11(*n'*), 11(*n''*), . . . so that it can be processed and played by them at the appropriate time as described above. The time period that is selected for the time delay may be fixed or variable, and in either case may be based on a number of factors. If the time period selected for the time delay is fixed, it may be based on, for example, factors such as an estimate of the maximum latency in the network 12, the estimated maximum loading of the various components comprising the zone players 11(*n*), and other estimates as will be appreciated by those skilled in the art.

The time delay may be the same for audio information from all types of audio information sources, and may be constant over the entire period that the synchrony group 20 is playing an audio work. Alternatively, different time delays may be utilized based on various criteria. For example, if the audio information is to be played independently of information associated with other types of media, the time delay may be

36

selected to be relatively long, on the order of a significant fraction of a second, or longer. On the other hand, if the audio information is to be played contemporaneously with, for example, video information, which may be supplied by, for example, a video disk, video tape cassette, over cable, satellite, or broadcast television, which may not be buffered or which may be displayed independently of the network audio system 10, it may be undesirable to provide for such a lengthy delay, since the time delay of the audio playback, in relation to the video display, may be noticeable. In that case, the zone player 11(*n*) may provide for a much shorter time delay. In one embodiment, the time delay provided for audio information to be played concurrently with video information is selected to be generally on the order of fifty milliseconds, which would barely, if at all, be perceptible to someone viewing the video. Other desirable time delays for information from other types of sources will be apparent to those skilled in the art.

As yet a further possibility, the zone player 11(*n*), when operating as an audio information channel device 23 for a synchrony group 20, can dynamically determine the time delay based on a number of conditions in the network audio system 10, including, for example, the message transfer latency in network 12, the loading of microprocessors or other components that are used in the various zone players 11(*n'*), 11(*n''*), . . . that may comprise a synchrony group 20, as well as other factors. For example, if the audio information channel device 23 determines that the latency in the network 12 has increased beyond a selected threshold, the audio information channel device 23 can adjust the delay to increase the likelihood that the members of the synchrony group 20 will be able to receive the packets and process the frames so that they will be able to play them at the appropriate times. Similarly, if the audio information channel device 23 is notified that a member of the synchrony group 20 to which it provides audio information requires additional time to receive and process the frames that it transmits, the audio information channel device 23 can adjust the delay accordingly. It will be appreciated that, to reduce or minimize possible discontinuities in the audio playback by the members of the synchrony group, the audio information channel device 23 can, instead of adjusting the time delay during a particular audio track, adjust the time delay between tracks, during silent periods of a track or otherwise as will be appreciated by those skilled in the art. In addition, the audio information channel device 23 can use conventional audio compression methodologies to facilitate a speeding up and/or slowing down of playback of an audio track while it is in the process of providing additional time delay. Generally, the members of the synchrony group 20 can provide notifications to the audio information channel device 23 if they determine that they will need an additional time delay, and the audio information channel device 23 can adjust the time delay in accordance with the notifications from the members of the synchrony group 20.

It will be appreciated that a system in accordance with the invention can be constructed in whole or in part from special purpose hardware or a general purpose computer system, or any combination thereof, any portion of which may be controlled by a suitable program. Any program may in whole or in part comprise part of or be stored on the system in a conventional manner, or it may in whole or in part be provided in to the system over a network or other mechanism for transferring information in a conventional manner. In addition, it will be appreciated that the system may be operated and/or otherwise controlled by means of information provided by an operator using operator input elements (not shown) which may be connected directly to the system or

US 9,195,258 B2

37

which may transfer the information to the system over a network or other mechanism for transferring information in a conventional manner.

The foregoing description has been limited to a specific embodiment of this invention. It will be apparent, however, that various variations and modifications may be made to the invention, with the attainment of some or all of the advantages of the invention. It is the object of the appended claims to cover these and such other variations and modifications as come within the true spirit and scope of the invention.

What is claimed as new and desired to be secured by Letters Patent of the United States is:

1. In a system comprising a plurality of controllers that are communicatively coupled via at least a local area network (LAN) with a plurality of zone players including a first zone player and a second zone player, a method comprising:

receiving, at the first zone player, control information from any one of the plurality of controllers via the LAN, wherein the received control information comprises a direction that instructs the first zone player to enter into a synchrony group with at least the second zone player; in response to the direction, the first zone player entering into the synchrony group with the second zone player, wherein in the synchrony group, the first and second zone players are configured to play back audio in synchrony based at least in part on (i) audio content, (ii) playback timing information associated with the audio content that is generated by one of the first or second zone players, and (iii) clock time information for the one of the first or second zone players, and wherein the generated playback timing information and the clock time information are transmitted from the one of the first or second zone players to the other of the first or second zone players, wherein the first and second zone players remain independently clocked while playing back audio in synchrony; and

transmitting, by the first zone player to at least one of the plurality of controllers via the LAN, status information, wherein the status information comprises an indication of a status of the synchrony group.

2. The method of claim 1, wherein the status information further comprises one or both of (a) an identification of a track currently being played by the synchrony group and (b) an identification of tracks scheduled to be played by the synchrony group.

3. The method of claim 2, wherein the identification of a track currently being played by the synchrony group further comprises a name of the track currently being played by the synchrony group.

4. The method of claim 2, wherein the identification of the tracks scheduled to be played by the synchrony group comprises a list of names of tracks scheduled to be played by the synchrony group.

5. The method of claim 1, wherein the status information further comprises one or both of (a) an identification of a zone player that is operating as a master device of the synchrony group and (b) an identification of at least one zone player that is operating as a slave device of the synchrony group.

6. The method of claim 1, wherein the first zone player comprises a master device of the synchrony group.

7. The method of claim 1, further comprising: the first zone player determining whether it is operating as a master device of the synchrony group, and wherein transmitting status information to the at least one of the plurality of controllers comprises transmitting the status information to the at least one of the plurality of

38

controllers only while the first zone player is operating as the master device of the synchrony group.

8. The method of claim 7, further comprising:

receiving audio content via the network; and while the first zone player is operating as the master device of the synchrony group, transmitting the received audio content to at least one zone player that is operating as a slave device of the synchrony group.

9. The method of claim 1, wherein the first zone player comprises a device clock configured to generate clock time information for the first zone player, wherein the second zone player comprises a device clock configured to generate clock time information for the second zone player, and wherein the device clock of the first zone player operates independently of the device clock of the second zone player.

10. The method of claim 1, wherein the first zone player is a master zone player of the synchrony group, wherein the audio content comprises a plurality of frames, wherein the playback timing information associated with the audio content comprises a playback time for each frame of the audio content, and wherein the first zone player is configured to play back audio in synchrony with the second zone player based at least in part on (i) the audio content, (ii) playback timing information associated with the audio content, wherein the playback timing information is generated by the first zone player, and (iii) clock time information for the first zone player, and wherein the generated playback timing information and the clock time information are transmitted from the first zone player to the second zone player; and

wherein the first zone player playing back audio in synchrony comprises, for each frame of the audio content, the first zone player playing back the frame when the device clock of the first zone player is the same as the playback time for the frame.

11. A system comprising:

a plurality of zone players that are communicatively coupled via at least a local area network (LAN) with a plurality of controllers, wherein:

each of the plurality of controllers is configured to provide control information to any one of the plurality of zone players via the LAN; and

each of the plurality of zone players is configured to (a) receive control information from any one of the plurality of controllers via the LAN, wherein the received control information comprises a direction for the zone player to enter into a synchrony group with at least one other zone player of the plurality of zone players, (b) in response to the direction, enter into the synchrony group with the at least one other zone player of the plurality of zone players, wherein in the synchrony group, the zone player and the at least one other zone player are configured to play back audio in synchrony based at least in part on (b-i) audio content, (b-ii) playback timing information associated with the audio content, wherein the playback timing information is generated by and transmitted from one of the zone player or the at least one other zone player to the other of the zone player or the at least one other zone player and (b-iii) clock time information for the one of the zone player or the at least one other zone player, wherein the clock time information is generated by and transmitted from the one of the zone player or the at least one other zone player to the other of the zone player or the at least one other zone player, wherein the zone players in the synchrony group remain independently clocked while playing back audio in synchrony, and (c) transmit status information to at least one of the

US 9,195,258 B2

39

plurality of controllers via the LAN, wherein the status information comprises an indication of a status of the synchrony group.

12. The system of claim 11, wherein each of the plurality of zone players is configured to transmit the status information while it is configured to operate as a master device of the synchrony group.

13. The system of claim 11, wherein the status information further comprises one or both of (a) an identification of a track currently being played by the synchrony group and (b) an identification of tracks scheduled to be played by the synchrony group.

14. The system of claim 11, wherein the status information further comprises one or both of (a) an identification of a zone player of the plurality of zone players that is operating as a master device of the synchrony group and (b) an identification of at least one zone player of the plurality of zone players that is operating as a slave device of the synchrony group.

15. The system of claim 11, wherein a device clock of a first zone player is configured to generate clock time information for the first zone player, and wherein a device clock of a second zone player is configured to generate clock time information for the second zone player, and wherein the device clock of the first zone player operates independently from the device clock of the second zone player.

16. The system of claim 11, wherein the plurality of zone players comprises a first zone player and a second zone player, wherein the first zone player is a master zone player of the synchrony group, wherein the audio content comprises a plurality of frames, wherein the playback timing information associated with the audio content comprises a playback time for each frame of the audio content, and wherein the first zone player is configured to play back audio in synchrony with the second zone player based at least in part on (i) the audio content, (ii) playback timing information associated with the audio content, wherein the playback timing information is generated by the first zone player, and (iii) clock time information for the first zone player generated by a device clock of the first zone player, and wherein the generated playback timing information and the clock time information are transmitted from the first zone player to the second zone player; and

wherein the first zone player playing back audio in synchrony comprises, for each frame of the audio content, the first zone player playing back the frame when the first zone player's device clock is the same as the playback time for the frame; and

wherein the second zone player comprises a device clock, and wherein the second zone player playing back audio in synchrony comprises determining a time differential between the first zone player's device clock and the second zone player's device clock, and for each frame of the audio content, (i) determining a playout time for the frame based on (i-a) the playback timing information received from the first zone player and (i-b) the determined time differential, and (ii) playing the frame at the determined playout time.

17. A first zone player comprising:

a network interface configured to interface the first zone player with at least a local area network (LAN);

a device clock configured to generate clock time information for the first zone player;

one or more processors; and

a tangible, non-transitory computer-readable memory having instructions stored thereon that, when executed by the one or more processors, cause the first zone player to:

40

receive control information from any one of a plurality of controllers over the LAN via the network interface, wherein the received control information comprises a direction for the first zone player to enter into a synchrony group with at least a second zone player;

in response to the direction, enter into the synchrony group with the second zone player, wherein in the synchrony group, the first and second zone players are configured to playback audio in synchrony based at least in part on (i) audio content, (ii) playback timing information associated with the audio content, wherein the playback timing information is generated by one of the first or second zone players, and (iii) clock time information for the one of the first or second zone players, and wherein the generated playback timing information and the clock time information are transmitted from the one of the first or second zone players to the other of the first or second zone players, wherein the first and second zone players remain independently clocked while playing back audio in synchrony; and

transmit status information to at least one of the plurality of controllers over the LAN via the network interface, wherein the status information comprises an indication of a status of the synchrony group.

18. The first zone player of claim 17, wherein the status information further comprises one or both of (a) an identification of a track currently being played by the synchrony group and (b) an identification of tracks scheduled to be played by the synchrony group.

19. The first zone player of claim 18 wherein the identification of the track currently being played by the synchrony group comprises a name of the track currently being played by the synchrony group.

20. The first zone player of claim 18, wherein the identification of the tracks scheduled to be played by the synchrony group comprises a list of names of tracks scheduled to be played by the synchrony group.

21. The first zone player of claim 17, wherein the status information further comprises one or both of (a) an identification of a zone player that is operating as a master device of the synchrony group and (b) an identification of at least one zone player that is operating as a slave device of the synchrony group.

22. The first zone player of claim 17, wherein the first zone player comprises a master device of the synchrony group.

23. The first zone player of claim 17, wherein the tangible computer-readable memory further has instructions stored thereon that, when executed by the one or more processors, cause the first zone player to determine whether the first zone player is operating as a master device of the synchrony group, and wherein the instructions that cause the first zone player to transmit status information to the at least one of the plurality of controllers comprise instructions that cause the first zone player to transmit status information to the at least one of the plurality of controllers only while the first zone player is operating as the master device of the synchrony group.

24. The first zone player of claim 23, wherein the tangible computer-readable memory further has instructions stored thereon that, when executed by the one or more processors, cause the first zone player to:

receive audio content via the network interface; and

while the first zone player is operating as the master device of the synchrony group, transmit the received audio content, via the network interface, to at least one zone player that is operating as a slave device of the synchrony group.

US 9,195,258 B2

41

25. The first zone player of claim 17, wherein the device clock of the first zone player operates independently of a device clock of the second zone player.

26. The first zone player of claim 17, wherein the first zone player is a master zone player of the synchrony group, 5 wherein the audio content comprises a plurality of frames, wherein the playback timing information associated with the audio content comprises a playback time for each frame of the audio content, and wherein the first zone player is configured to play back audio in synchrony with the second zone player 10 based at least in part on (i) the audio content, (ii) playback timing information associated with the audio content, wherein the playback timing information is generated by the first zone player, and (iii) clock time information for the first zone player, and wherein the generated playback timing 15 information and the clock time information are transmitted from the first zone player to the second zone player; and wherein the first zone player playing back audio in synchrony comprises, for each frame of the audio content, the first zone player playing back the frame when the 20 device clock of the first zone player is the same as the playback time for the frame.

* * * * *

42

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 9,195,258 B2
APPLICATION NO. : 14/184935
DATED : November 24, 2015
INVENTOR(S) : Millington


Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On the title page item [63] should read:

Continuation of application No. 13/864,251, filed on Apr. 17, 2013, which is a continuation of application No. 13/297,000, filed on Nov. 15, 2011, which is a continuation of application No. 10/816,217, filed on Apr. 1, 2004, now Pat. No. 8,234,395.

Signed and Sealed this
Seventh Day of June, 2016

A handwritten signature in black ink, reading "Michelle K. Lee". The signature is written in a cursive, flowing style.

Michelle K. Lee
Director of the United States Patent and Trademark Office